

# ***COMPUTER COMMUNICATION NETWORKS***

*(15EC64)*




# Chapter 12

## Multiple Access


---

**Figure 12.1** *Data link layer divided into two functionality-oriented sublayers*

---

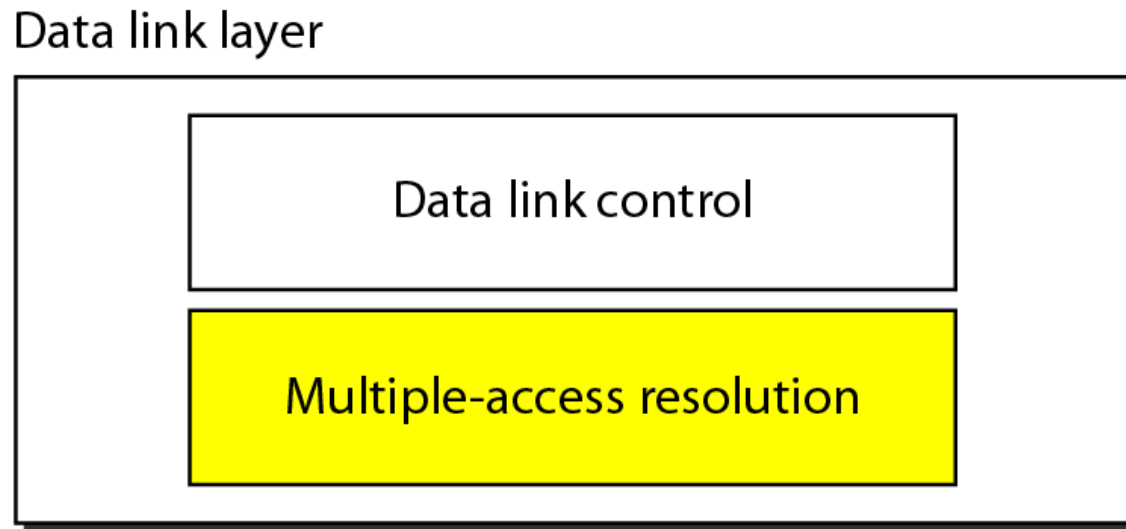

**Figure 12.2** *Taxonomy of multiple-access protocols discussed in this chapter*

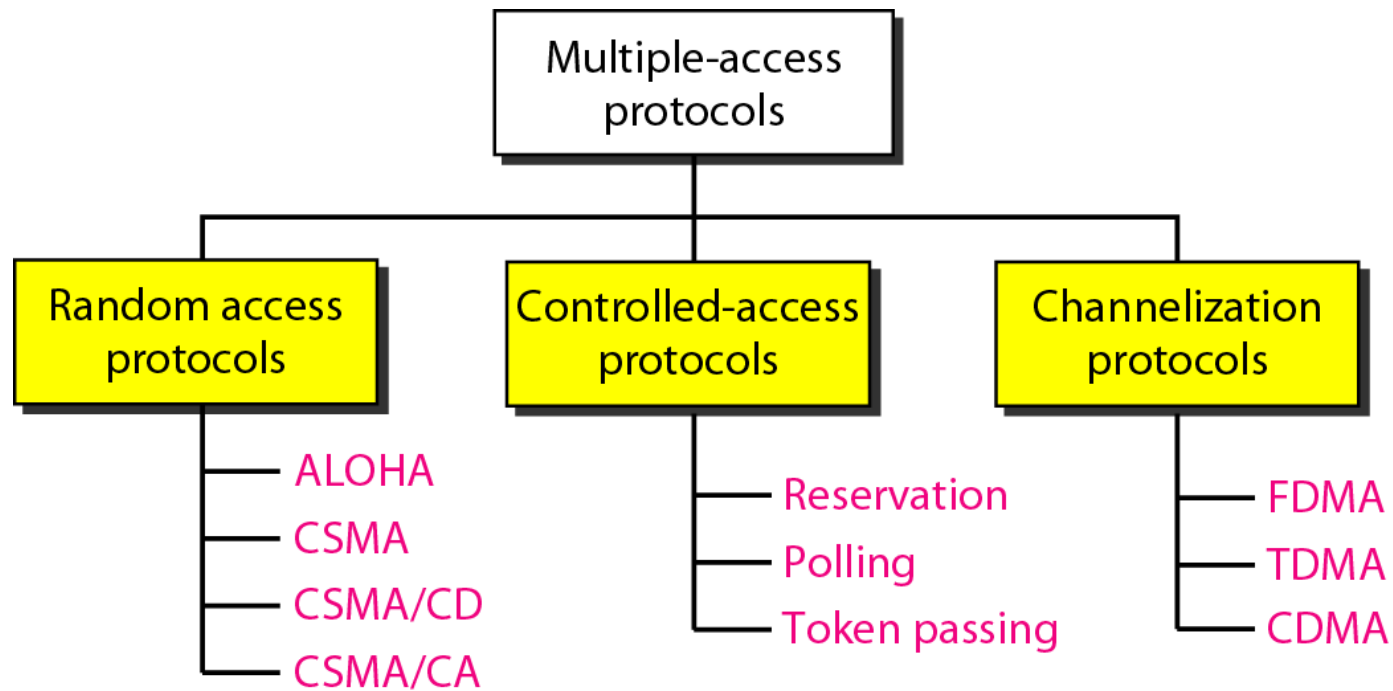

# 12-1 RANDOM ACCESS

*In **random access** or **contention** methods, no station is superior to another station and none is assigned the control over another. No station permits, or does not permit, another station to send. At each instance, a station that has data to send uses a procedure defined by the protocol to make a decision on whether or not to send.*

*Topics discussed in this section:*


**ALOHA**

**Carrier Sense Multiple Access**


**Carrier Sense Multiple Access with Collision Detection**

**Carrier Sense Multiple Access with Collision Avoidance**

**Figure 12.3** *Frames in a pure ALOHA network*

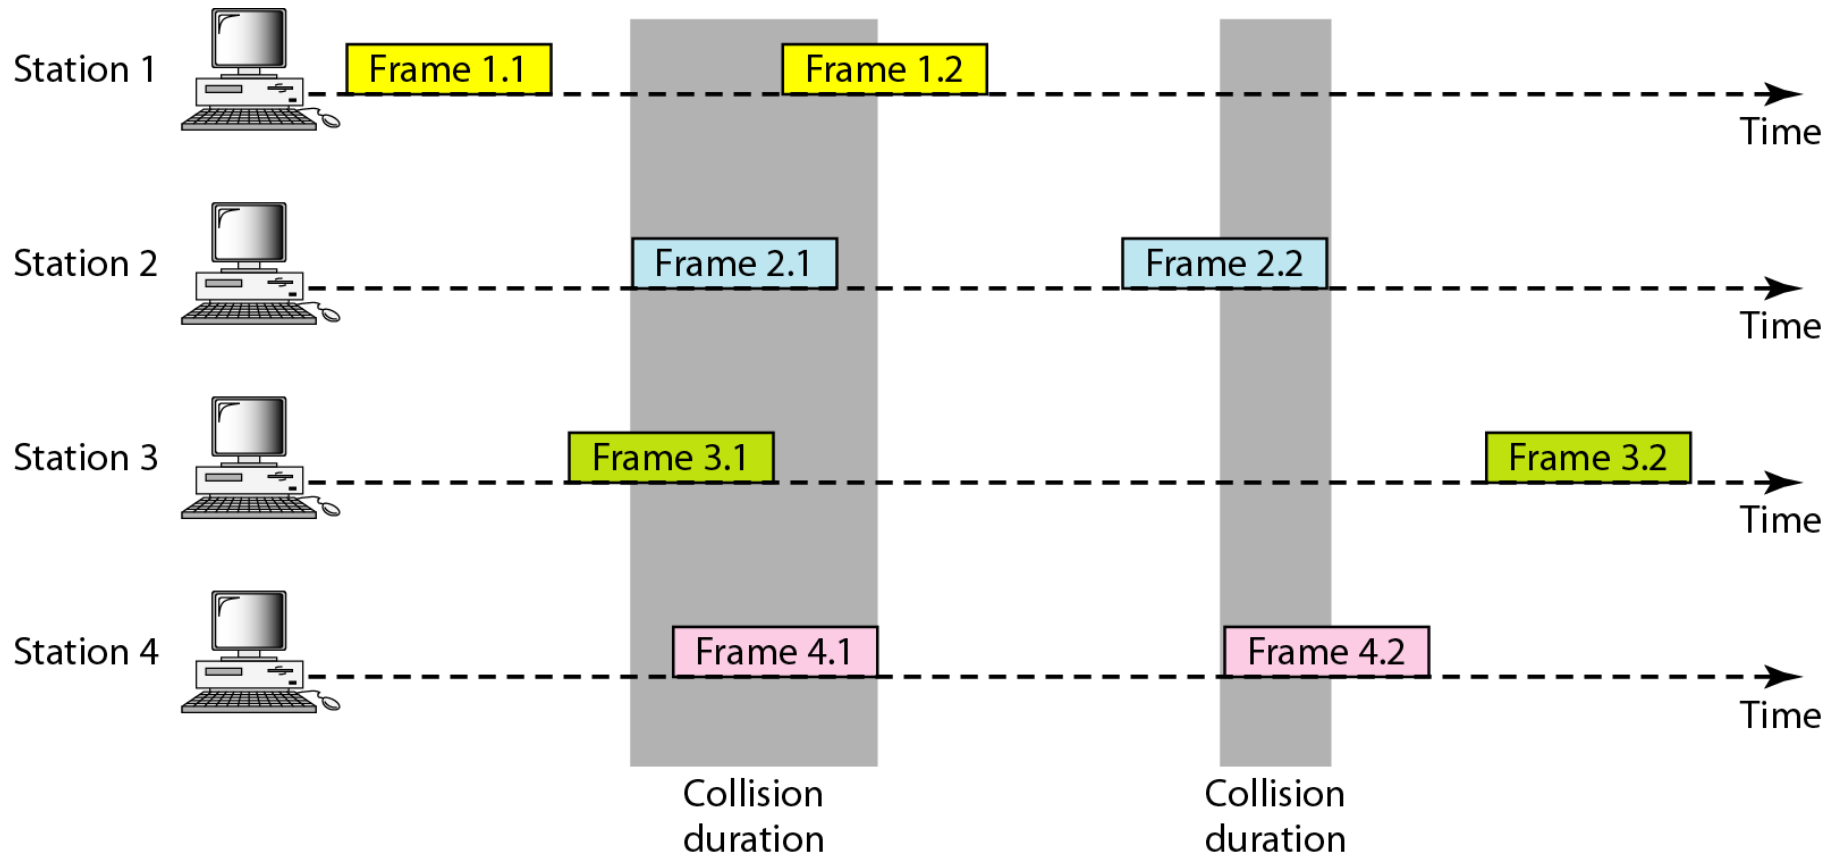

**Figure 12.4** Procedure for pure ALOHA protocol

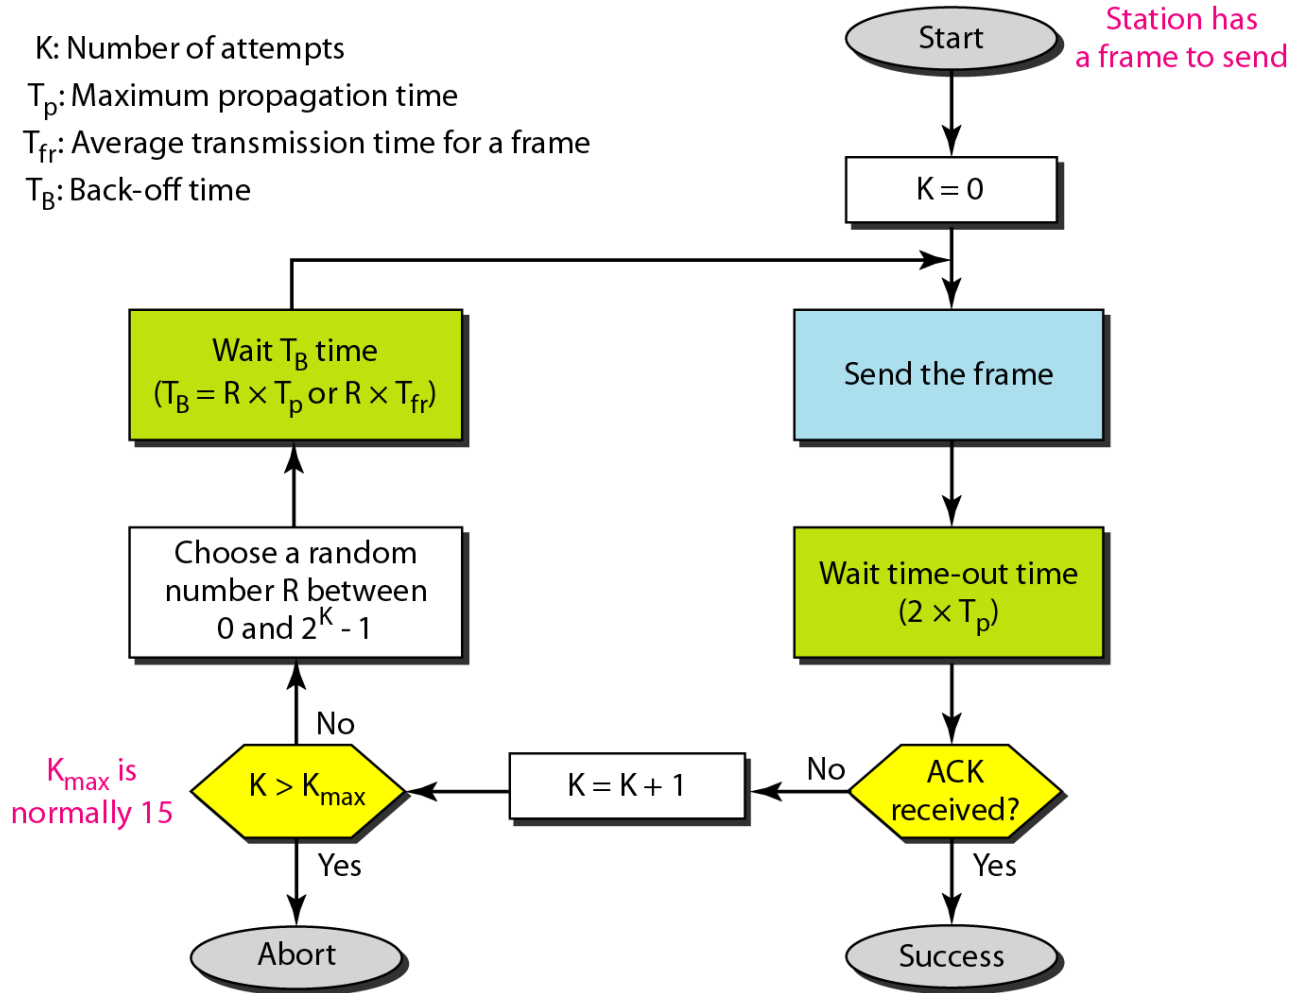

## Example 12.1

*The stations on a wireless ALOHA network are a maximum of 600 km apart. If we assume that signals propagate at  $3 \times 10^8$  m/s, we find*

$$T_p = (600 \times 10^5) / (3 \times 10^8) = 2 \text{ ms.}$$

*Now we can find the value of  $T_B$  for different values of  $K$ .*


- a. For  $K = 1$ , the range is  $\{0, 1\}$ . The station needs to generate a random number with a value of 0 or 1. This means that  $T_B$  is either 0 ms ( $0 \times 2$ ) or 2 ms ( $1 \times 2$ ), based on the outcome of the random variable.*



## *Example 12.1 (continued)*

- b. For  $K = 2$ , the range is  $\{0, 1, 2, 3\}$ . This means that  $T_B$  can be 0, 2, 4, or 6 ms, based on the outcome of the random variable.*
- c. For  $K = 3$ , the range is  $\{0, 1, 2, 3, 4, 5, 6, 7\}$ . This means that  $T_B$  can be 0, 2, 4, . . . , 14 ms, based on the outcome of the random variable.*
- d. We need to mention that if  $K > 10$ , it is normally set to 10.*

**Figure 12.5** *Vulnerable time for pure ALOHA protocol*

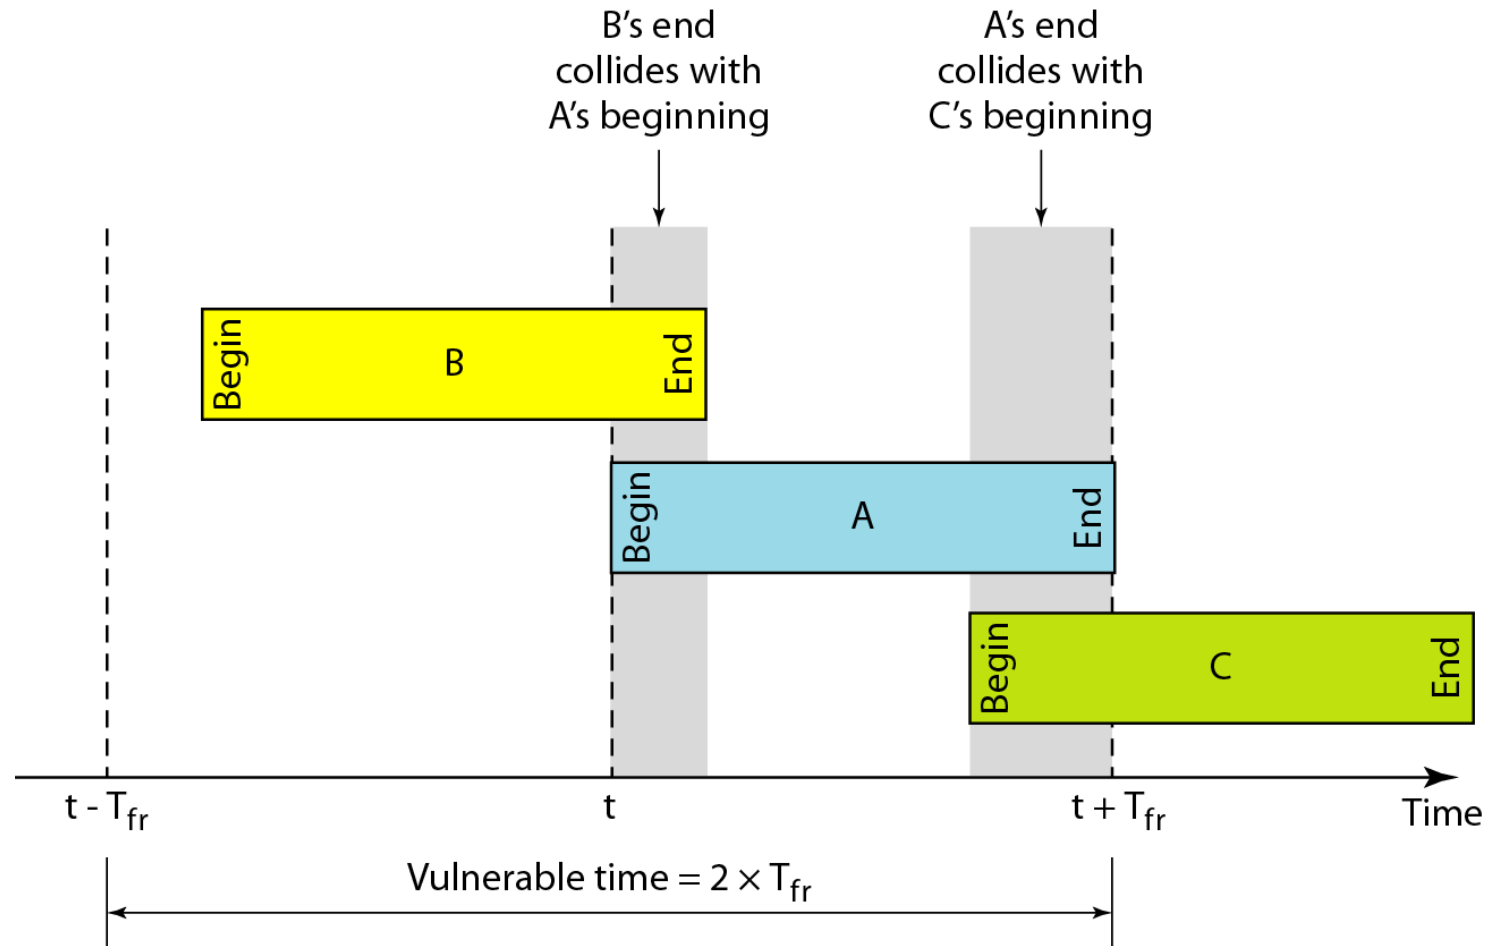

## Example 12.2

*A pure ALOHA network transmits 200-bit frames on a shared channel of 200 kbps. What is the requirement to make this frame collision-free?*

### *Solution*

*Average frame transmission time  $T_{fr}$  is 200 bits/200 kbps or 1 ms. The vulnerable time is  $2 \times 1 \text{ ms} = 2 \text{ ms}$ . This means no station should send later than 1 ms before this station starts transmission and no station should start sending during the one 1-ms period that this station is sending.*



*Note*

The throughput for pure ALOHA is

$$S = G \times e^{-2G} .$$

The maximum throughput

$$S_{\max} = 0.184 \text{ when } G = (1/2).$$

## *Example 12.3*

*A pure ALOHA network transmits 200-bit frames on a shared channel of 200 kbps. What is the throughput if the system (all stations together) produces*

- a. 1000 frames per second*
- b. 500 frames per second*
- c. 250 frames per second.*

### *Solution*


*The frame transmission time is 200/200 kbps or 1 ms.*

- a. If the system creates 1000 frames per second, this is 1 frame per millisecond. The load is 1. In this case  $S = G \times e^{-2G}$  or  $S = 0.135$  (13.5 percent). This means that the throughput is  $1000 \times 0.135 = 135$  frames. Only 135 frames out of 1000 will probably survive.*

## *Example 12.3 (continued)*

- b. If the system creates 500 frames per second, this is (1/2) frame per millisecond. The load is (1/2). In this case  $S = G \times e^{-2G}$  or  $S = 0.184$  (18.4 percent). This means that the throughput is  $500 \times 0.184 = 92$  and that only 92 frames out of 500 will probably survive. Note that this is the maximum throughput case, percentagewise.*
- c. If the system creates 250 frames per second, this is (1/4) frame per millisecond. The load is (1/4). In this case  $S = G \times e^{-2G}$  or  $S = 0.152$  (15.2 percent). This means that the throughput is  $250 \times 0.152 = 38$ . Only 38 frames out of 250 will probably survive.*

**Figure 12.6** *Frames in a slotted ALOHA network*

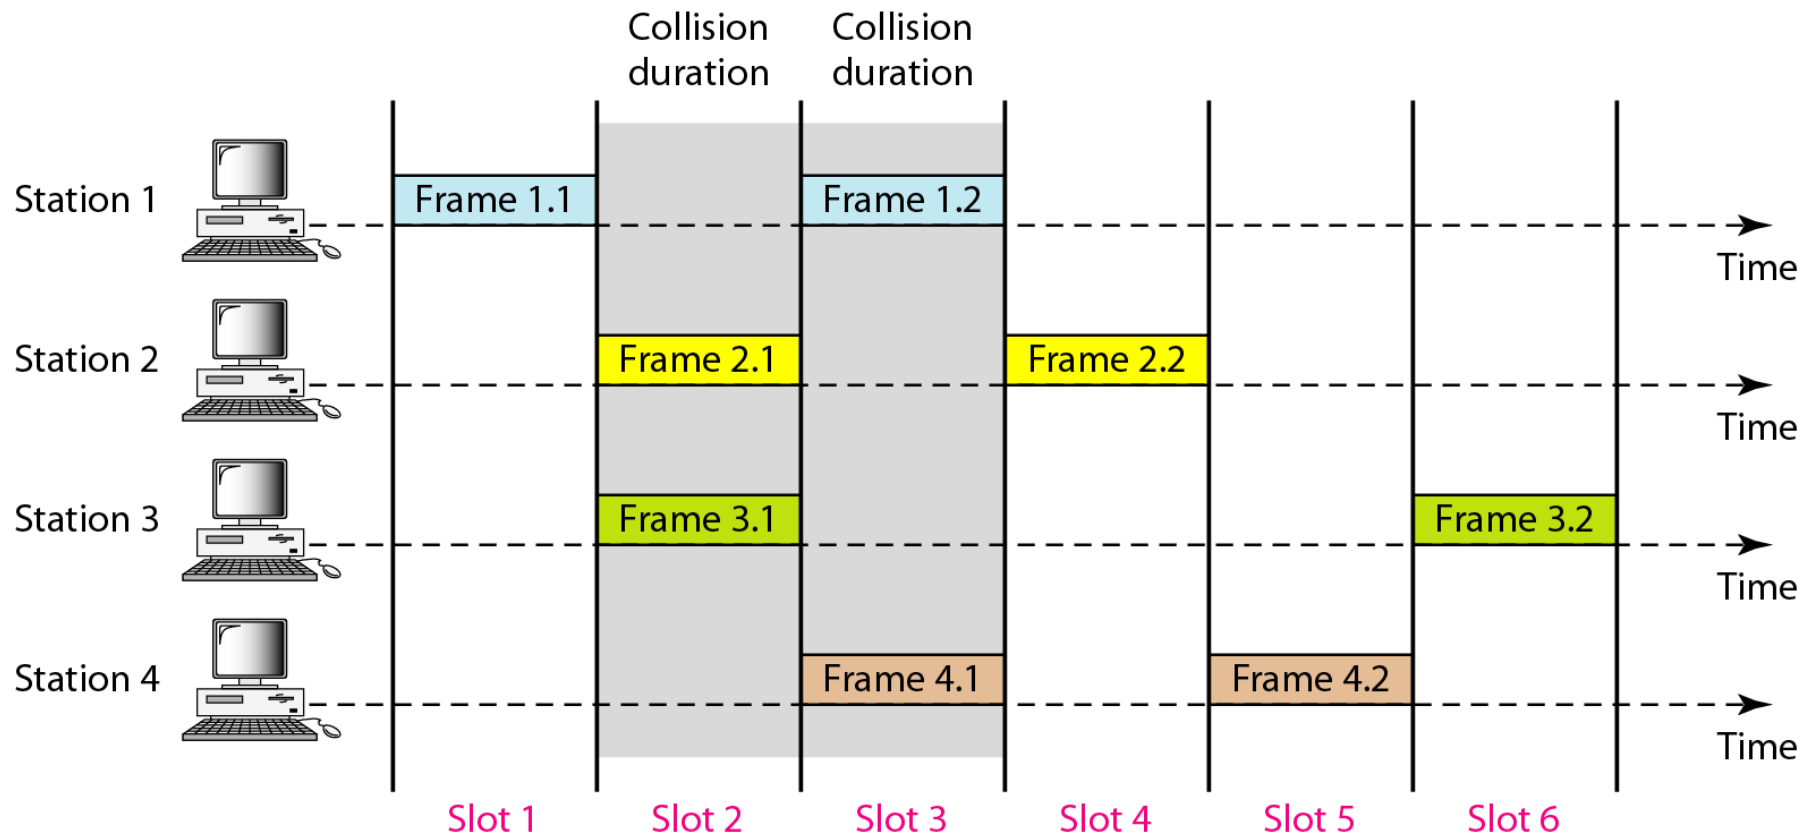



*Note*

The throughput for slotted ALOHA is


$$S = G \times e^{-G} .$$

The maximum throughput

$$S_{\max} = 0.368 \text{ when } G = 1.$$



**Figure 12.7** *Vulnerable time for slotted ALOHA protocol*

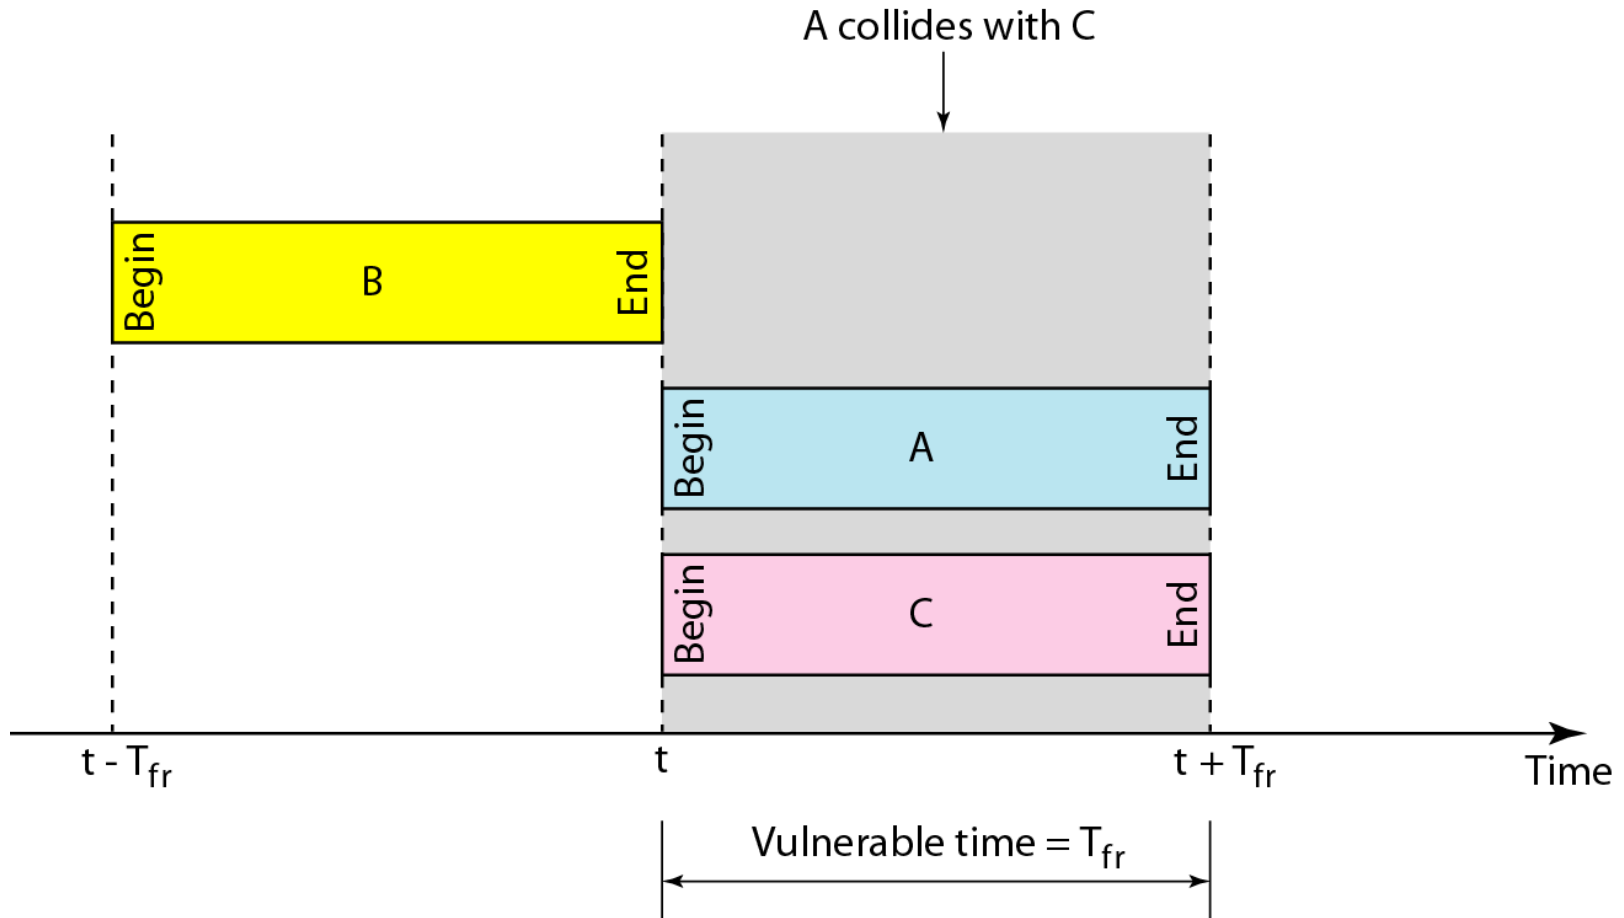

## *Example 12.4*

*A slotted ALOHA network transmits 200-bit frames on a shared channel of 200 kbps. What is the throughput if the system (all stations together) produces*

- a. 1000 frames per second*
- b. 500 frames per second*
- c. 250 frames per second.*

### *Solution*


*The frame transmission time is 200/200 kbps or 1 ms.*

- a. If the system creates 1000 frames per second, this is 1 frame per millisecond. The load is 1. In this case  $S = G \times e^{-G}$  or  $S = 0.368$  (36.8 percent). This means that the throughput is  $1000 \times 0.0368 = 368$  frames. Only 386 frames out of 1000 will probably survive.*


## *Example 12.4 (continued)*

- b. If the system creates 500 frames per second, this is (1/2) frame per millisecond. The load is (1/2). In this case  $S = G \times e^{-G}$  or  $S = 0.303$  (30.3 percent). This means that the throughput is  $500 \times 0.303 = 151$ . Only 151 frames out of 500 will probably survive.*
- c. If the system creates 250 frames per second, this is (1/4) frame per millisecond. The load is (1/4). In this case  $S = G \times e^{-G}$  or  $S = 0.195$  (19.5 percent). This means that the throughput is  $250 \times 0.195 = 49$ . Only 49 frames out of 250 will probably survive.*


**Figure 12.8** *Space/time model of the collision in CSMA*

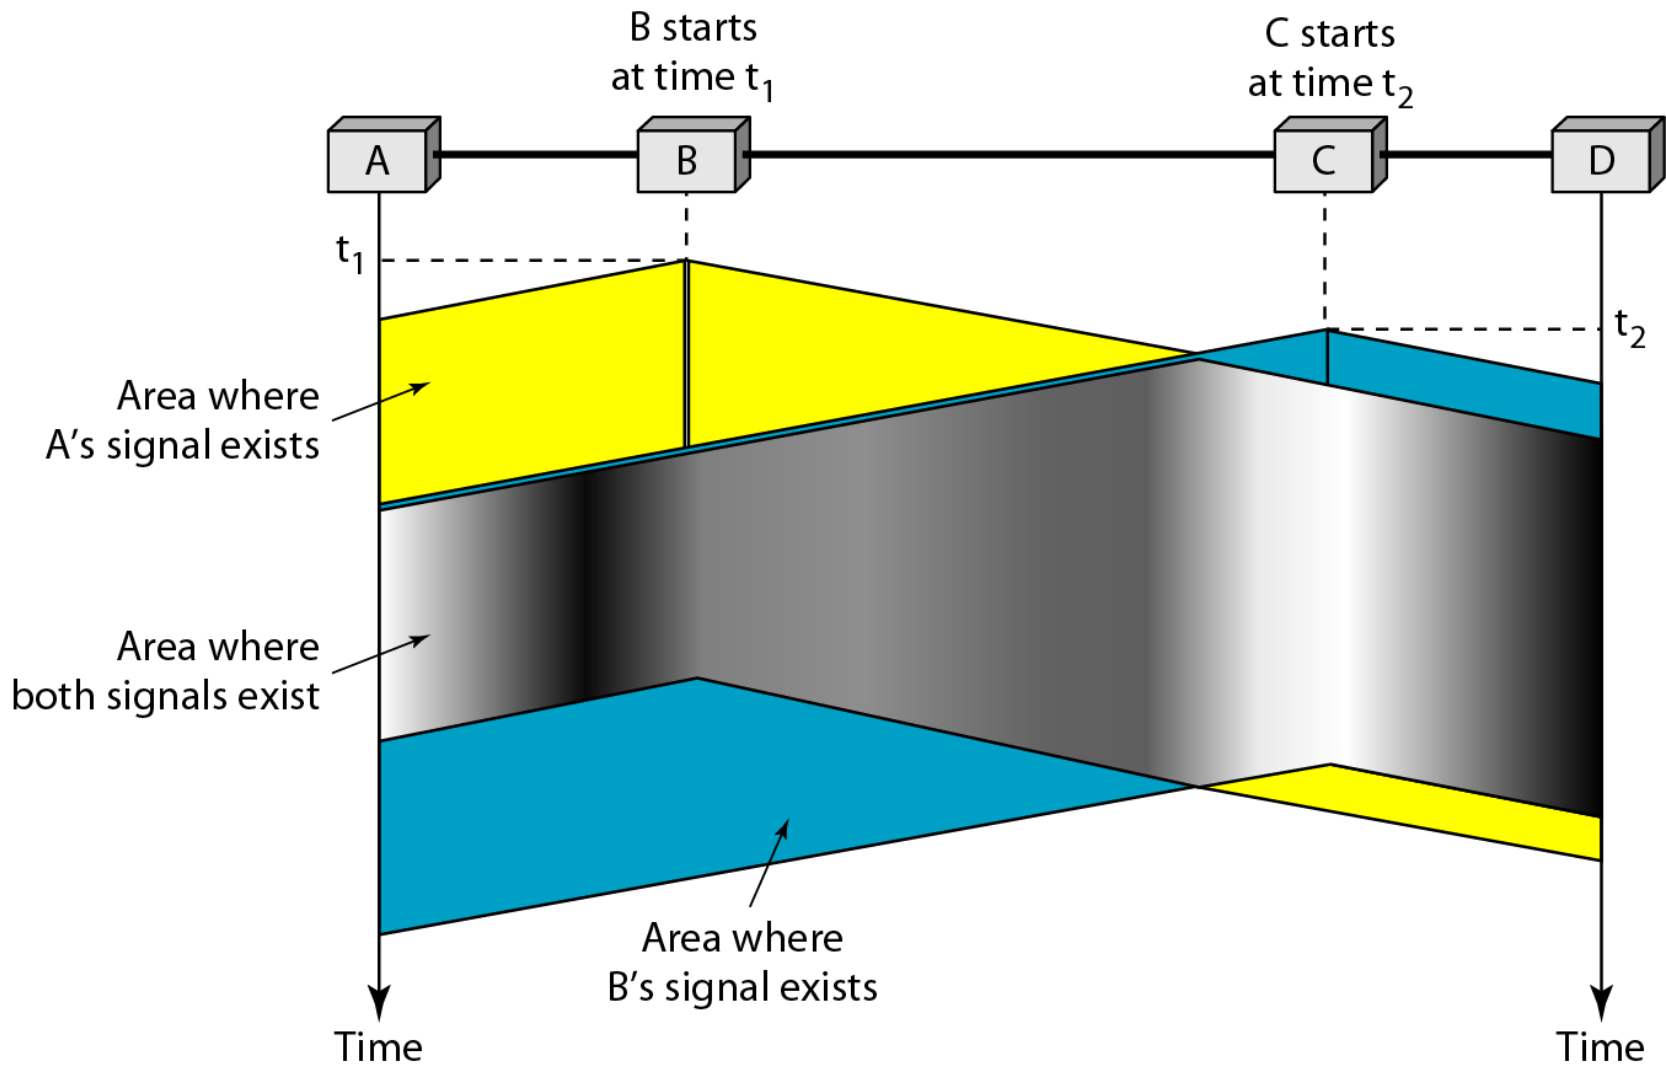


**Figure 12.9** *Vulnerable time in CSMA*

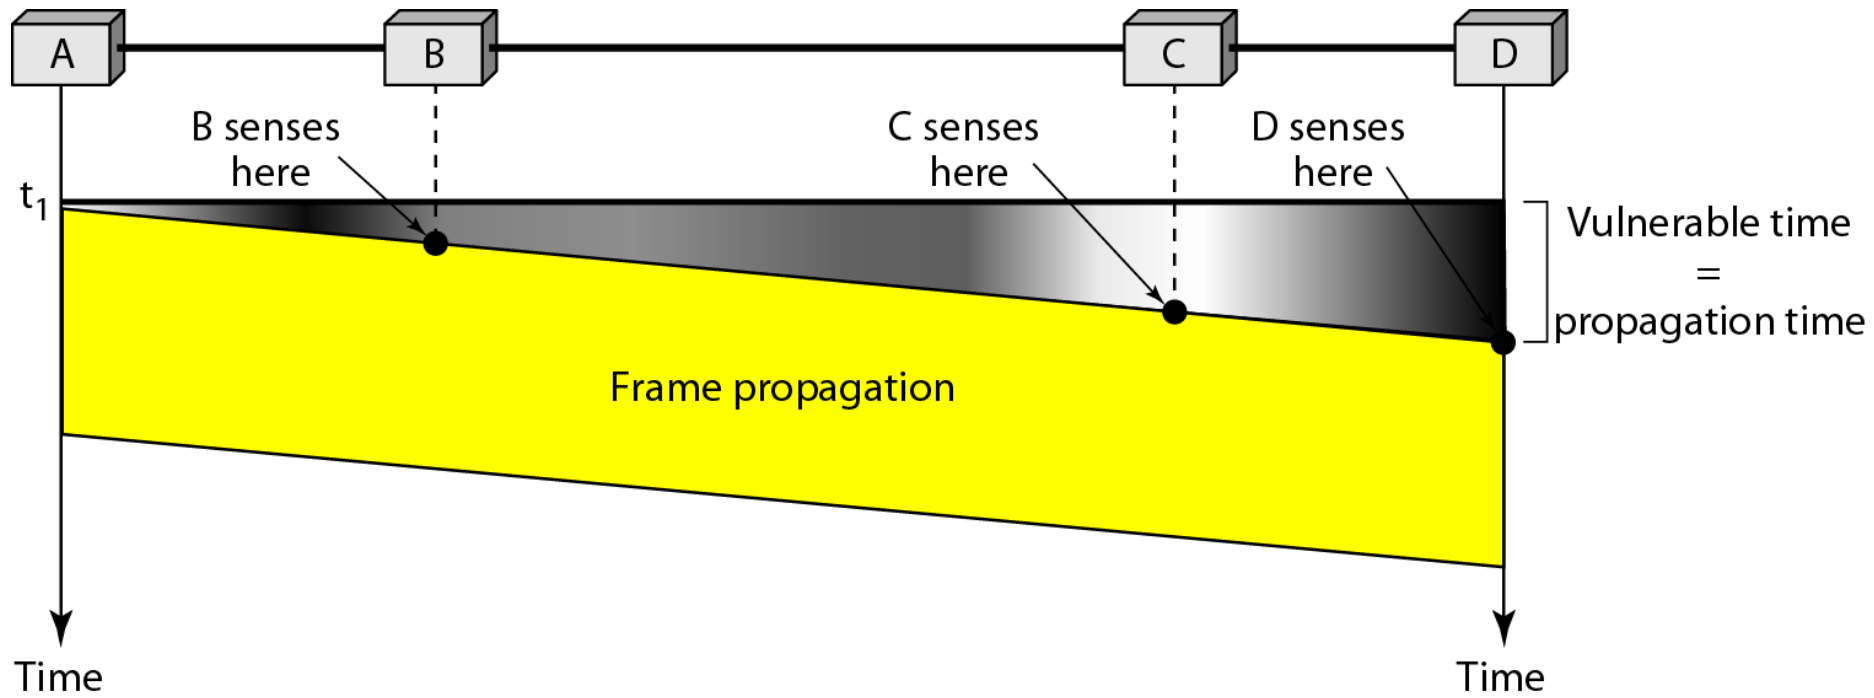


## Figure 12.10 Behavior of three persistence methods

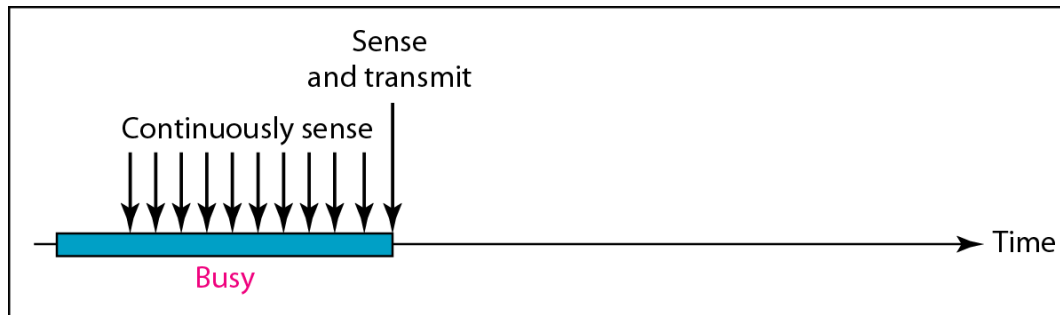

a. 1-persistent

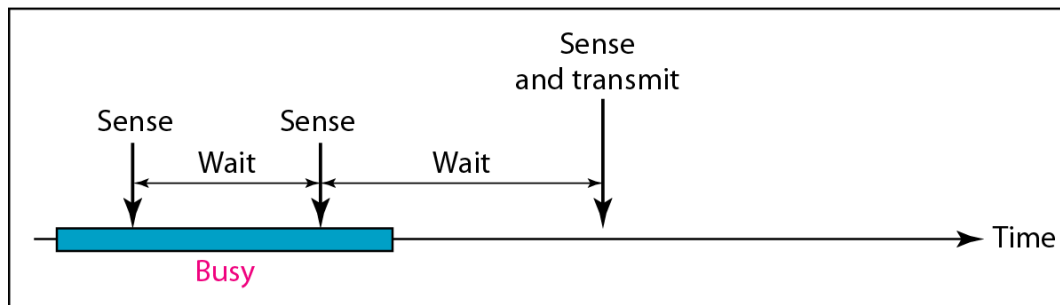


b. Nonpersistent

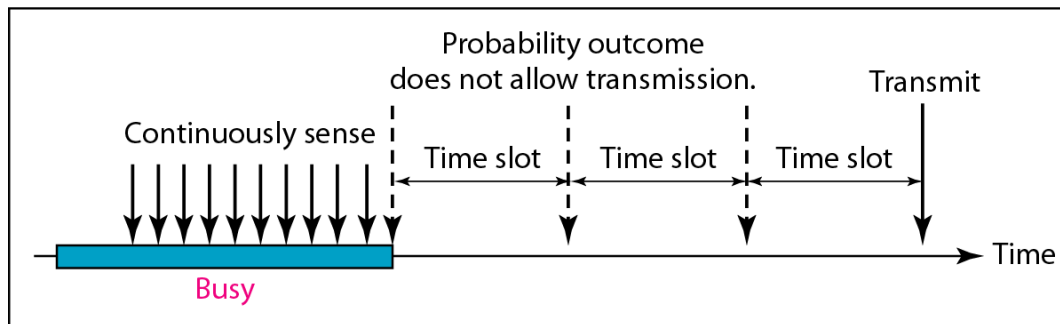


c. p-persistent


**Figure 12.11** *Flow diagram for three persistence methods*

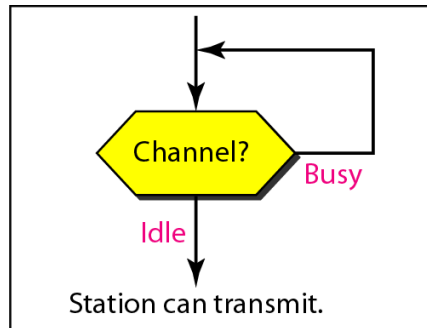

a. 1-persistent

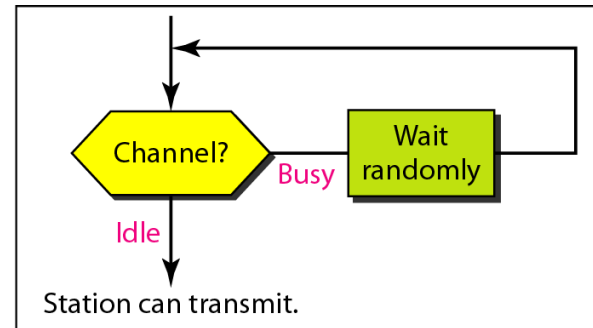


b. Nonpersistent

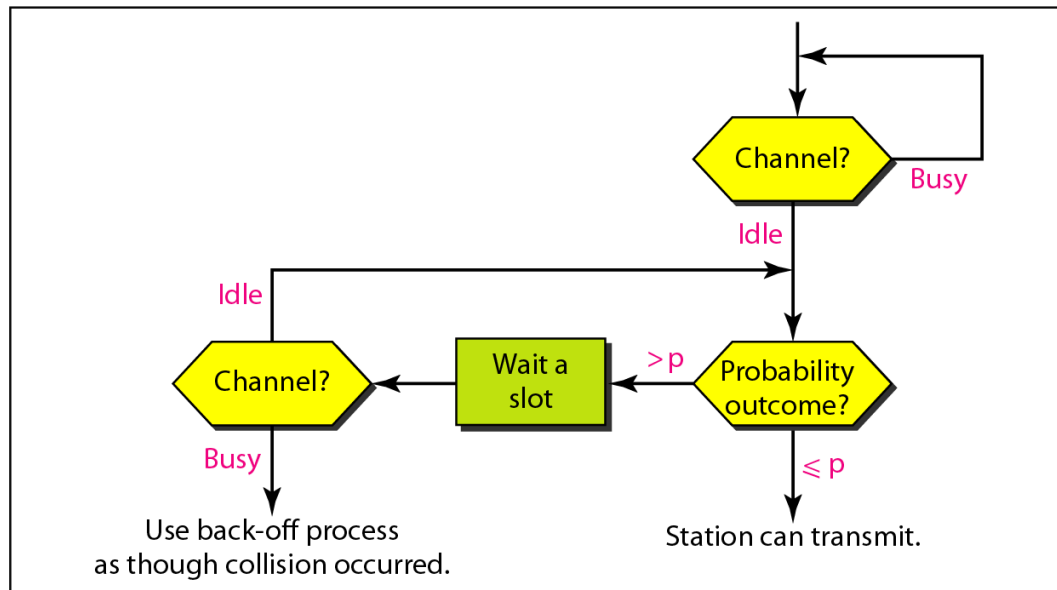


c. p-persistent

**Figure 12.12** *Collision of the first bit in CSMA/CD*

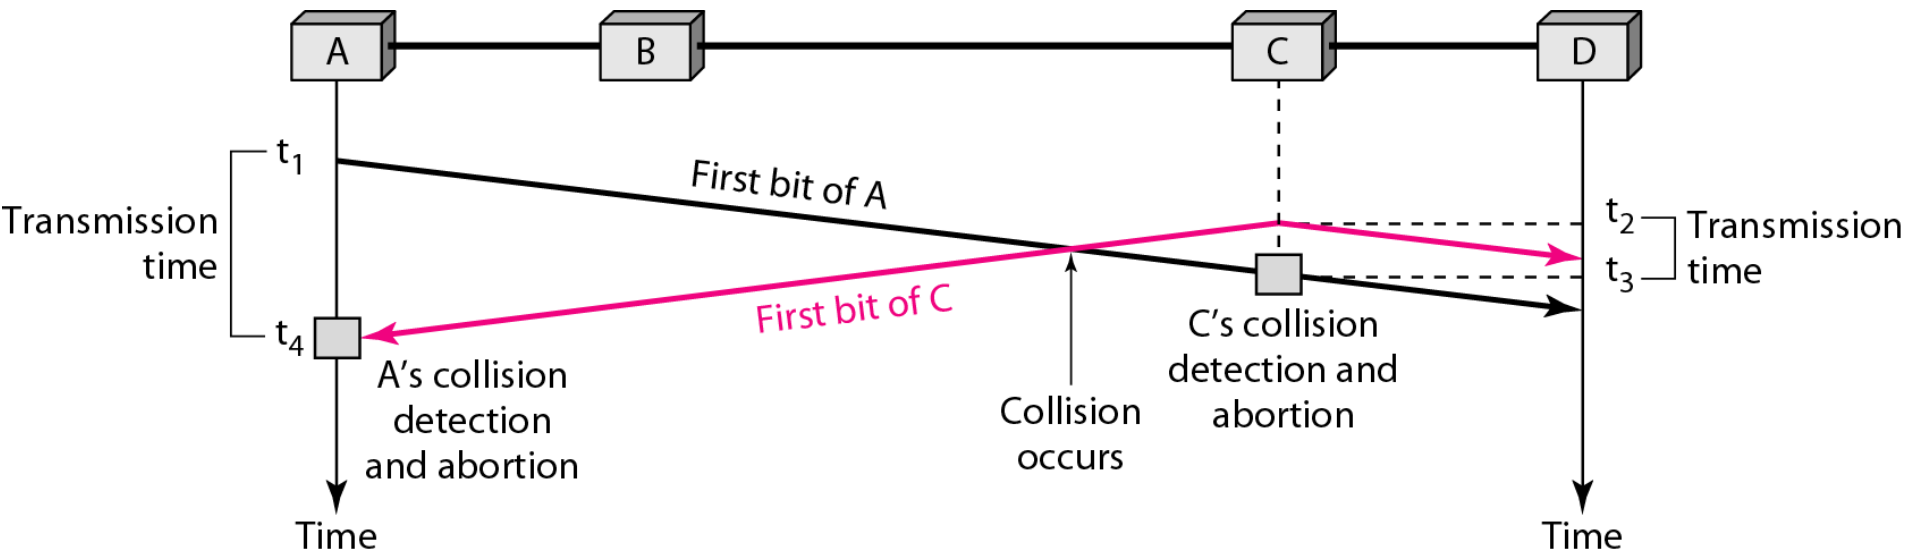



**Figure 12.13** *Collision and abortion in CSMA/CD*

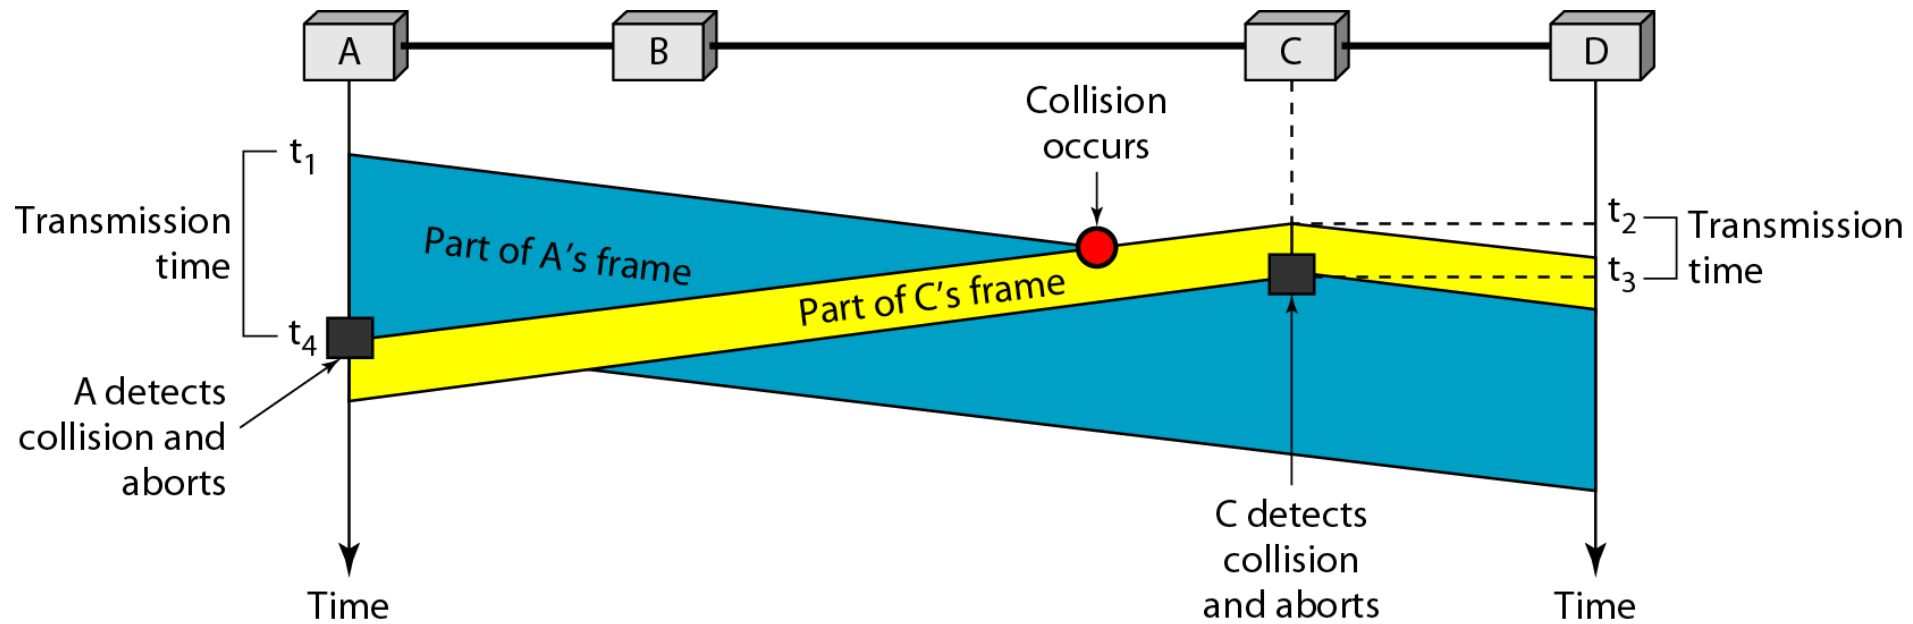


## *Example 12.5*

*A network using CSMA/CD has a bandwidth of 10 Mbps. If the maximum propagation time (including the delays in the devices and ignoring the time needed to send a jamming signal, as we see later) is  $25.6 \mu\text{s}$ , what is the minimum size of the frame?*


### *Solution*

*The frame transmission time is  $T_{fr} = 2 \times T_p = 51.2 \mu\text{s}$ . This means, in the worst case, a station needs to transmit for a period of  $51.2 \mu\text{s}$  to detect the collision. The minimum size of the frame is  $10 \text{ Mbps} \times 51.2 \mu\text{s} = 512$  bits or 64 bytes. This is actually the minimum size of the frame for Standard Ethernet.*


**Figure 12.14** *Flow diagram for the CSMA/CD*

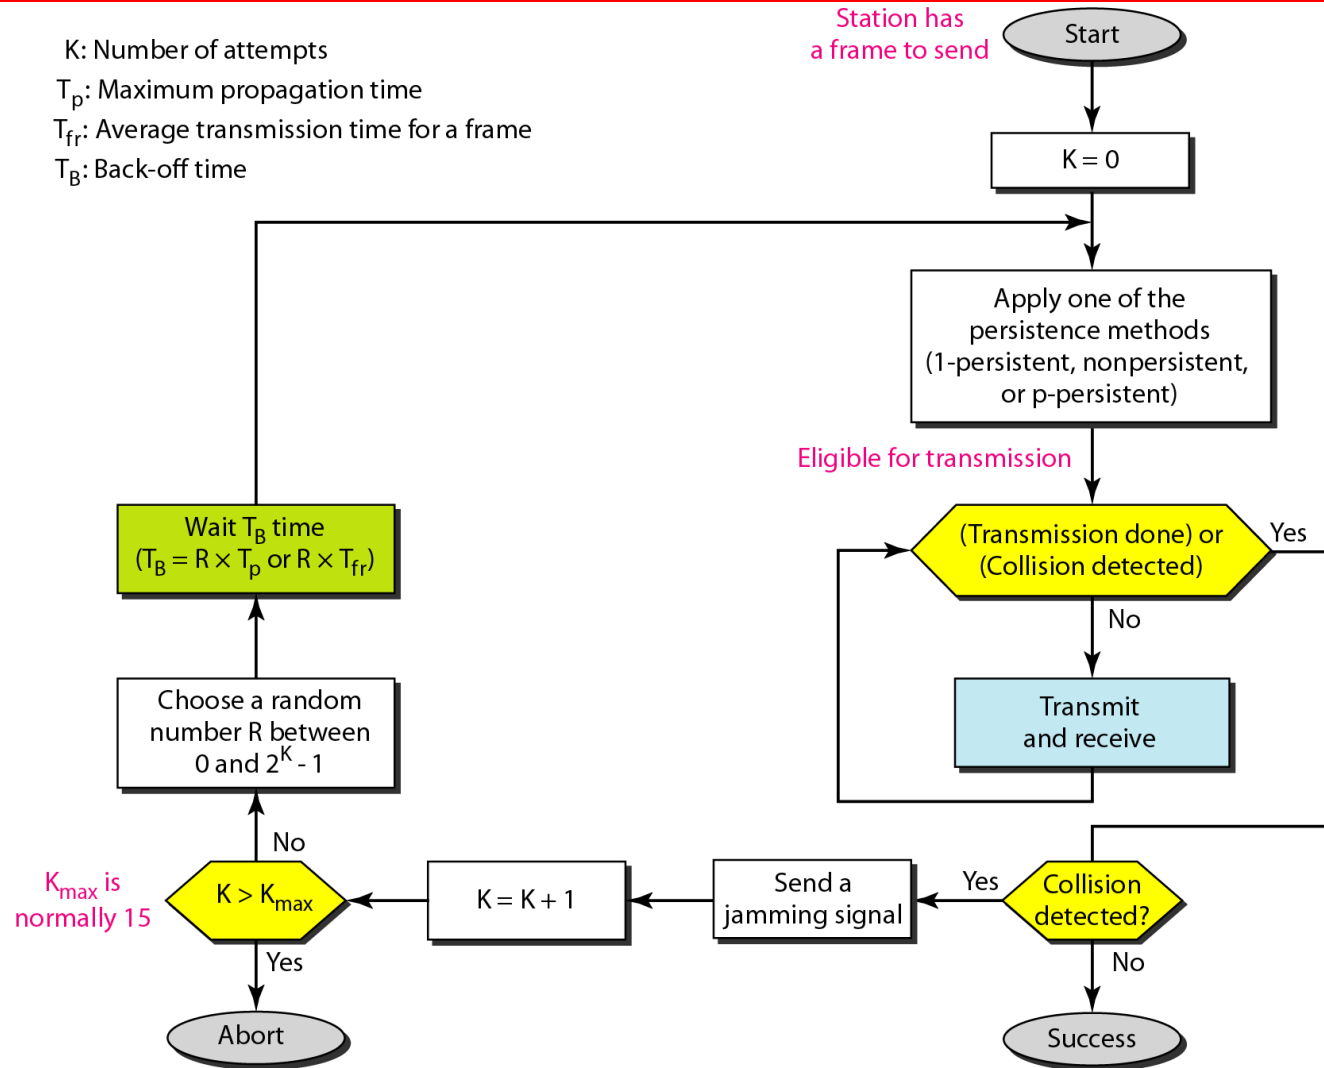

**Figure 12.15** *Energy level during transmission, idleness, or collision*

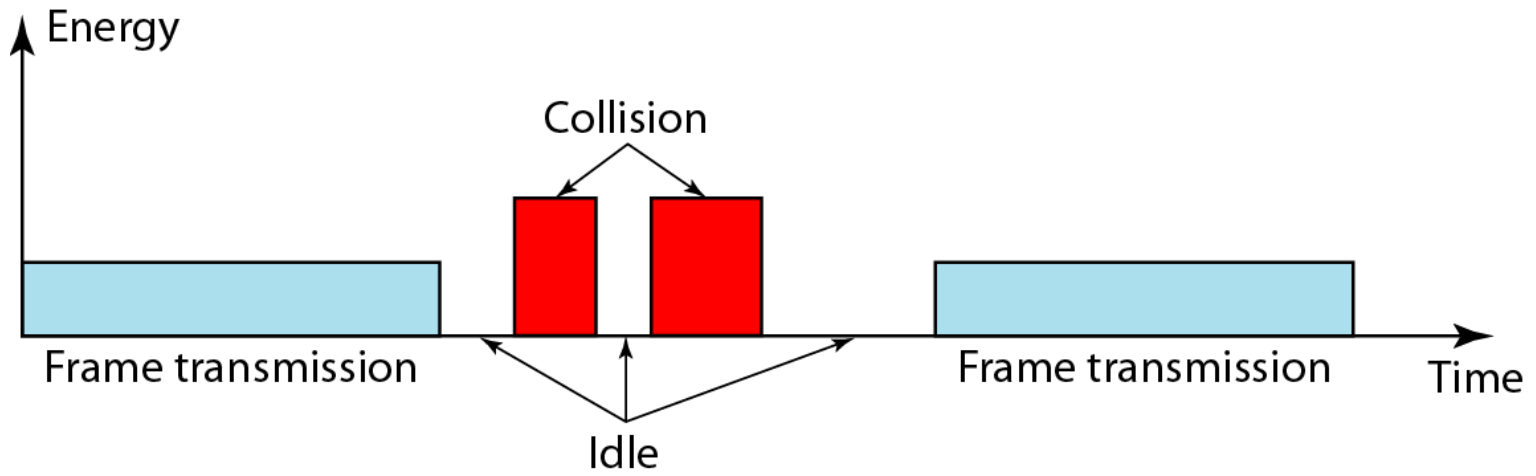

**Figure 12.16** *Timing in CSMA/CA*

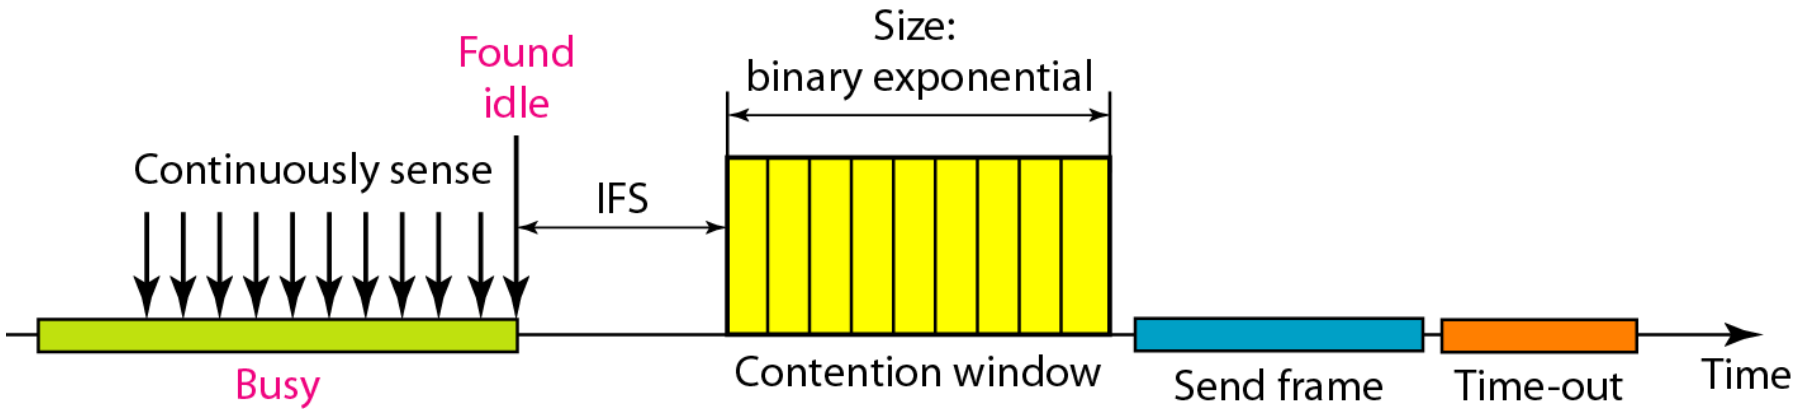



---

*Note*


**In CSMA/CA, the IFS can also be used to define the priority of a station or a frame.**



*Note*

**In CSMA/CA, if the station finds the channel busy, it does not restart the timer of the contention window; it stops the timer and restarts it when the channel becomes idle.**

**Figure 12.17** *Flow diagram for CSMA/CA*

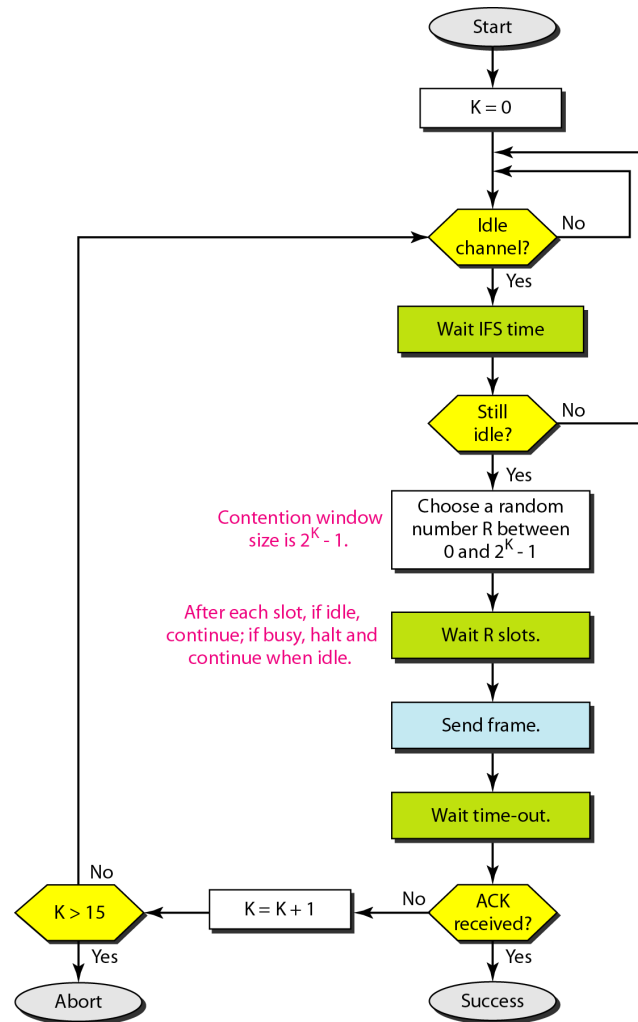



## 12-2 CONTROLLED ACCESS

*In **controlled access**, the stations consult one another to find which station has the right to send. A station cannot send unless it has been authorized by other stations. We discuss three popular controlled-access methods.*


*Topics discussed in this section:*

**Reservation**


**Polling**

**Token Passing**


**Figure 12.18** *Reservation access method*

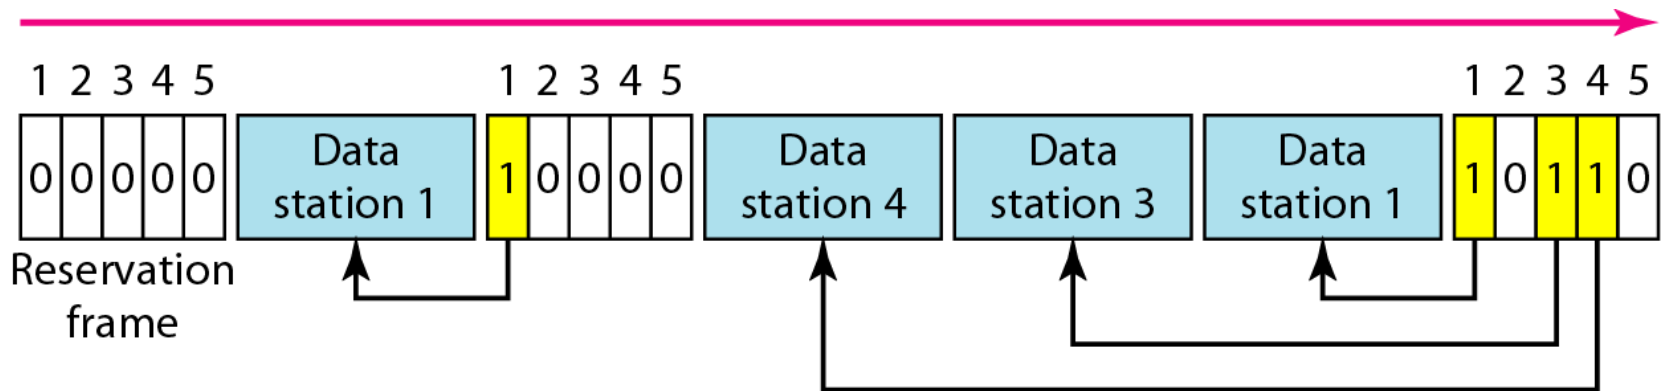


**Figure 12.19** *Select and poll functions in polling access method*

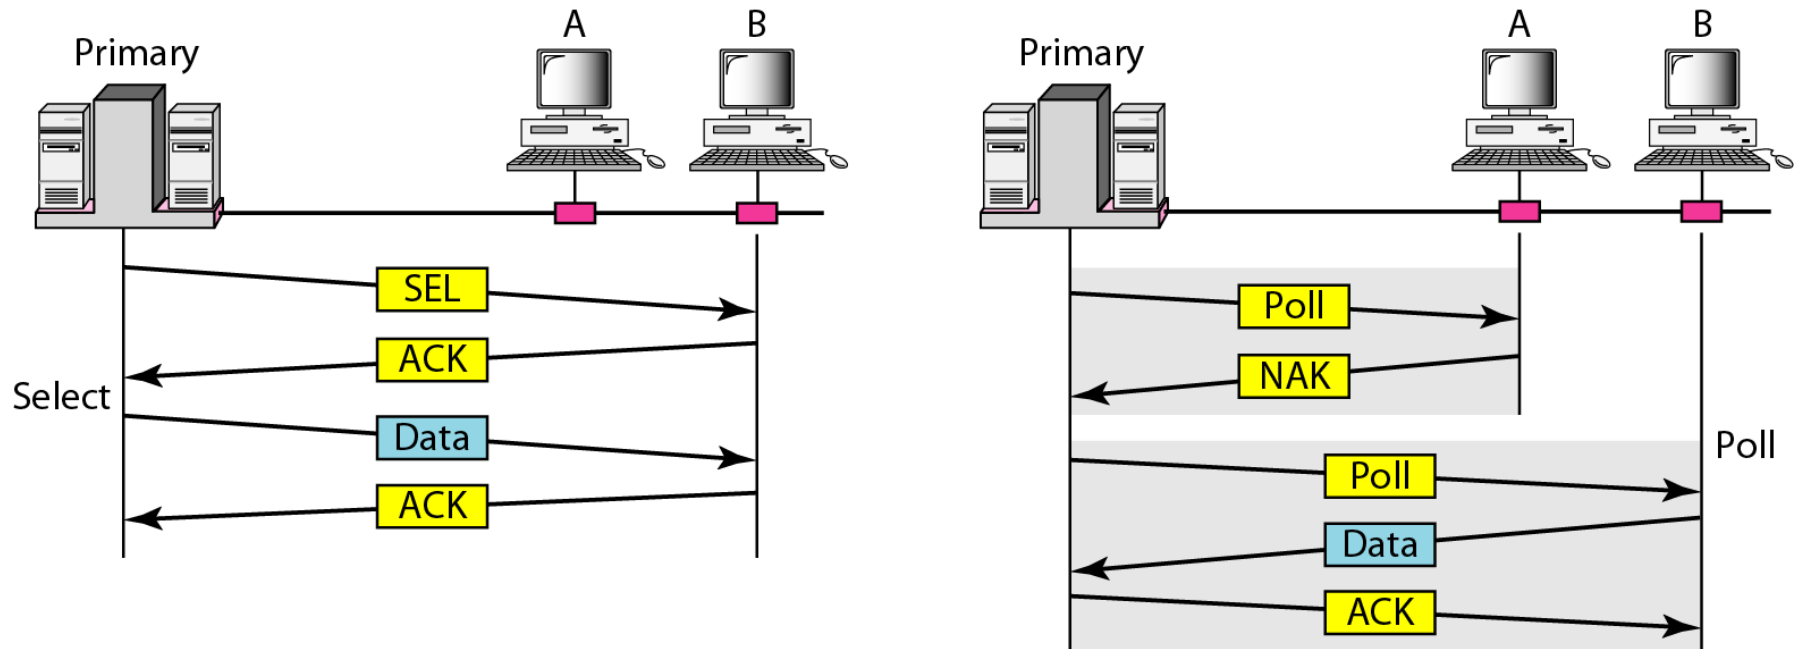


**Figure 12.20** *Logical ring and physical topology in token-passing access method*

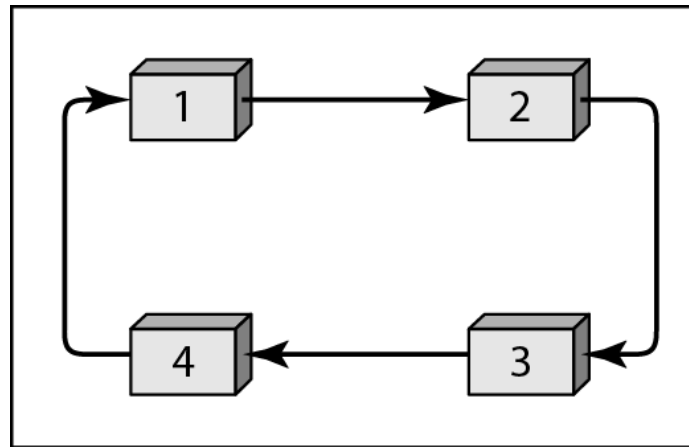


a. Physical ring

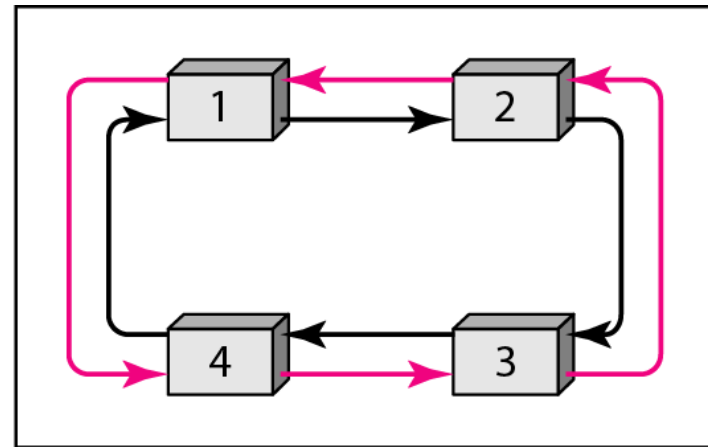

b. Dual ring

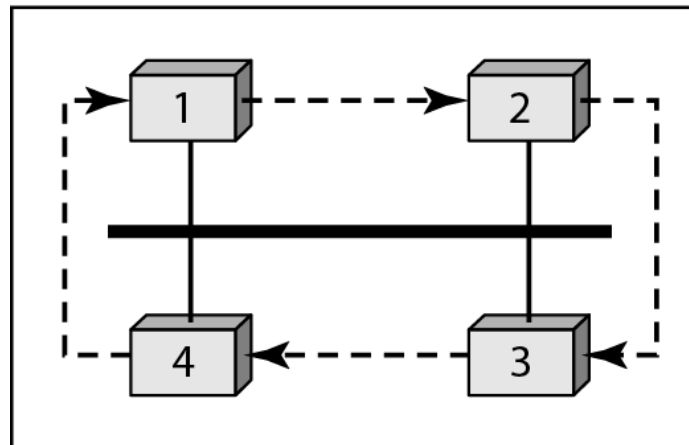

c. Bus ring

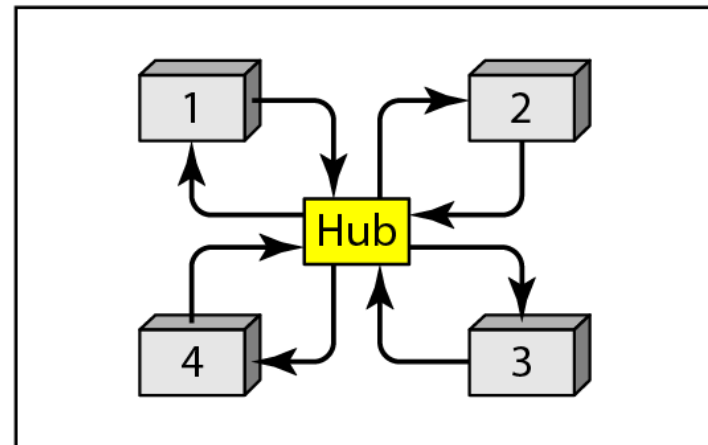

d. Star ring

## 12-3 CHANNELIZATION

***Channelization** is a multiple-access method in which the available bandwidth of a link is shared in time, frequency, or through code, between different stations. In this section, we discuss three channelization protocols.*

***Topics discussed in this section:***

**Frequency-Division Multiple Access (FDMA)**

**Time-Division Multiple Access (TDMA)**


**Code-Division Multiple Access (CDMA)**



*Note*

**We see the application of all these methods in Chapter 16 when we discuss cellular phone systems.**

**Figure 12.21** *Frequency-division multiple access (FDMA)*

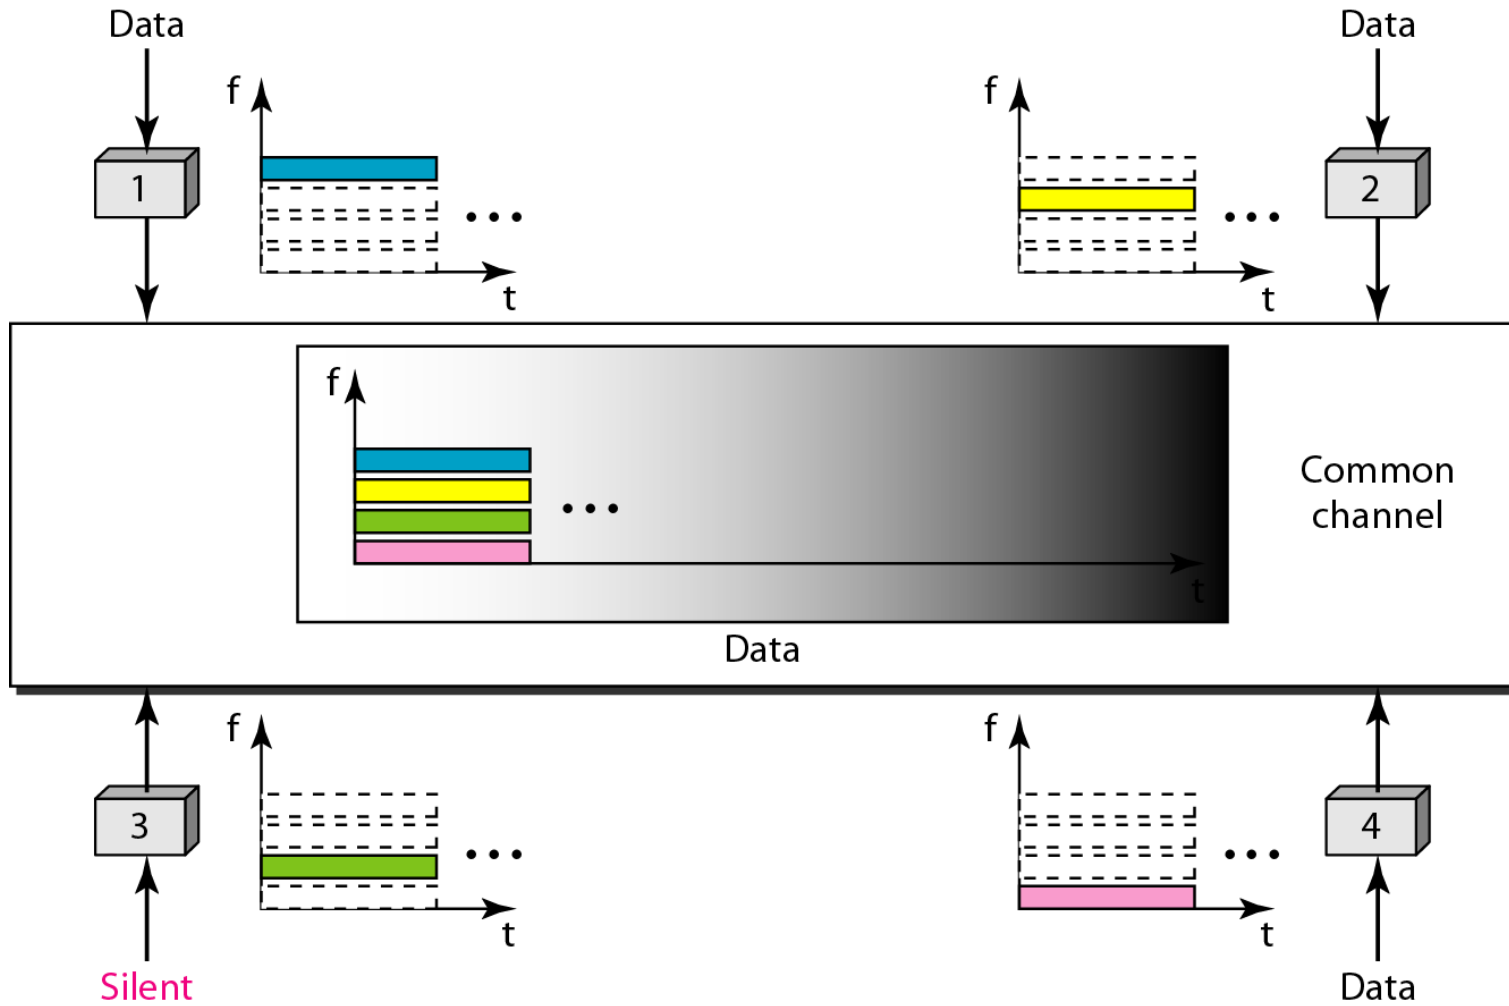




*Note*

**In FDMA, the available bandwidth of the common channel is divided into bands that are separated by guard bands.**



**Figure 12.22** *Time-division multiple access (TDMA)*

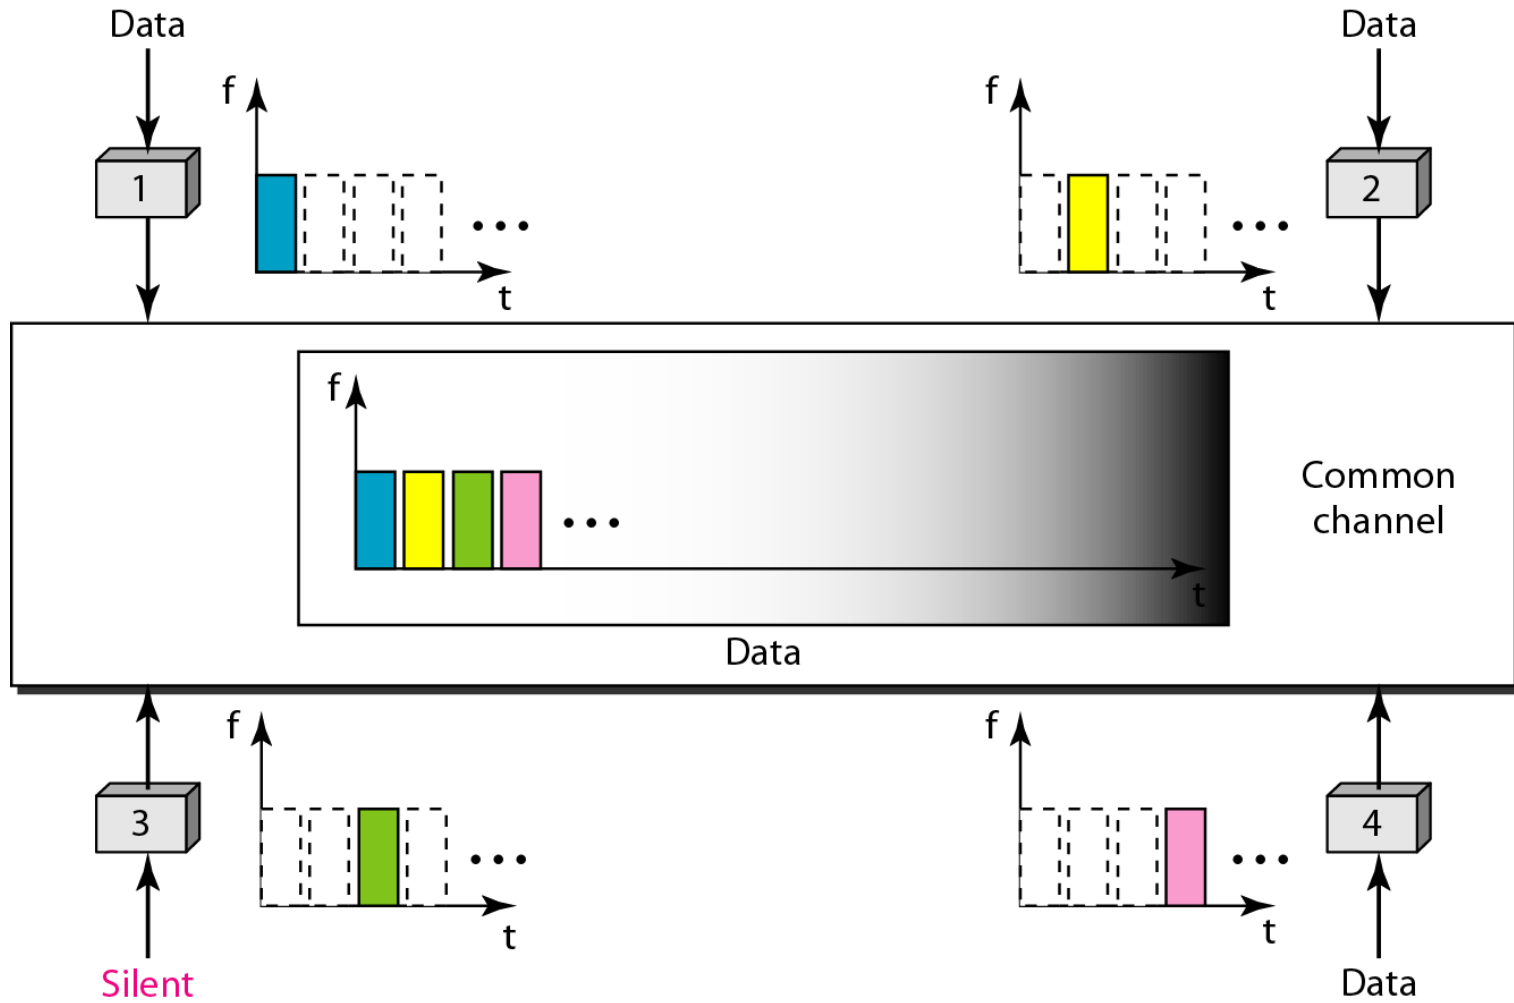



---

*Note*

**In TDMA, the bandwidth is just one channel that is timeshared between different stations.**




---

*Note*

**In CDMA, one channel carries all transmissions simultaneously.**

**Figure 12.23** *Simple idea of communication with code*

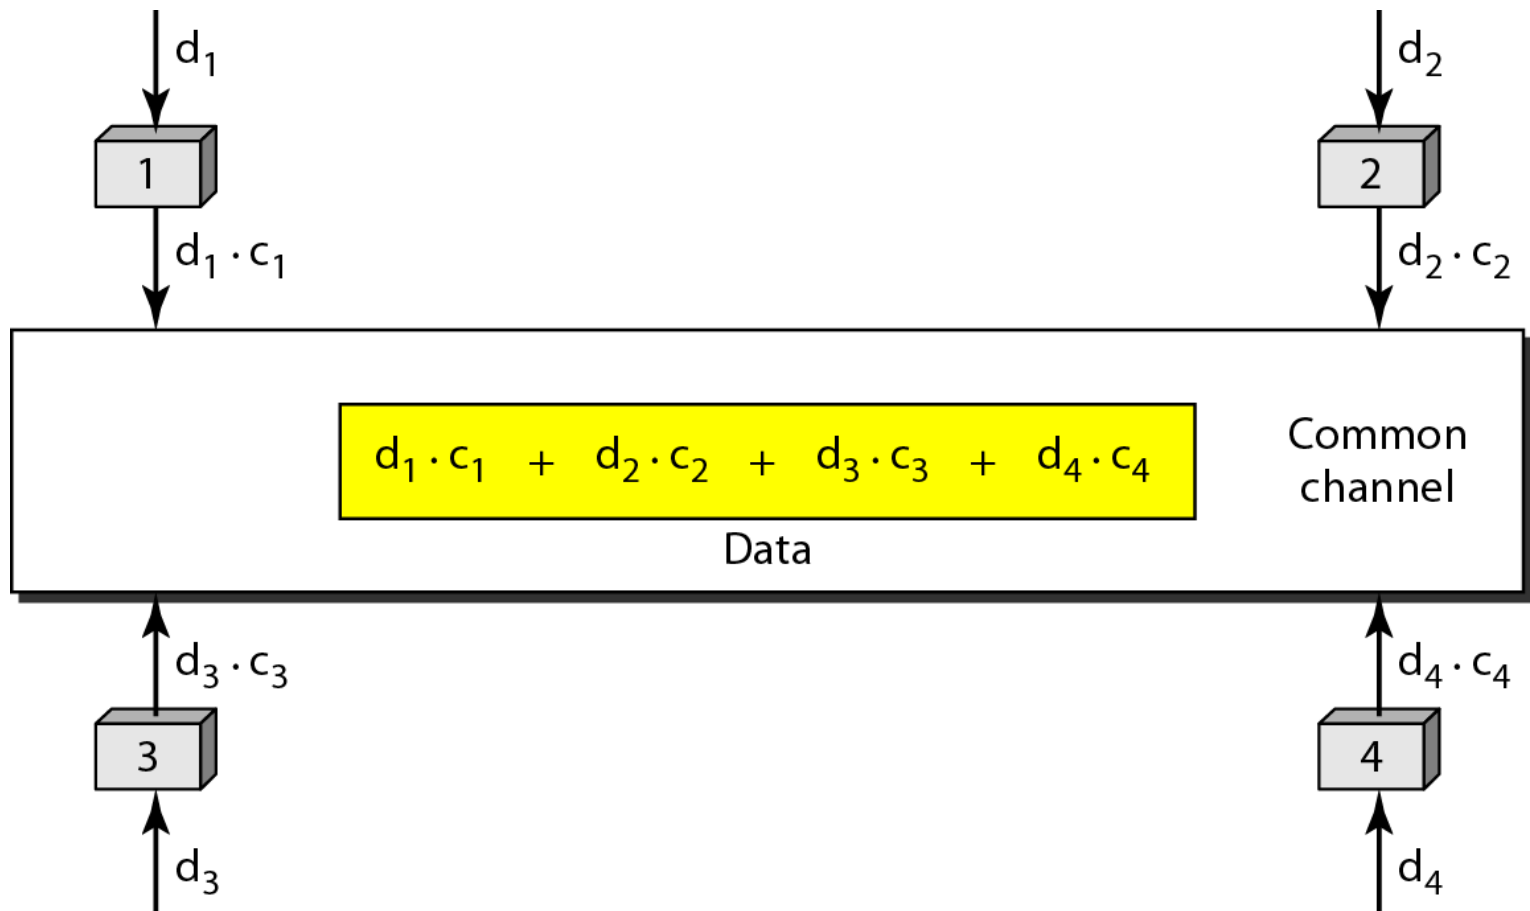

---

## Figure 12.24 *Chip sequences*

---

$C_1$

[+1 +1 +1 +1]

$C_2$

[+1 -1 +1 -1]

$C_3$

[+1 +1 -1 -1]

$C_4$

[+1 -1 -1 +1]

---


---

## Figure 12.25 *Data representation in CDMA*


---



**Figure 12.26** *Sharing channel in CDMA*

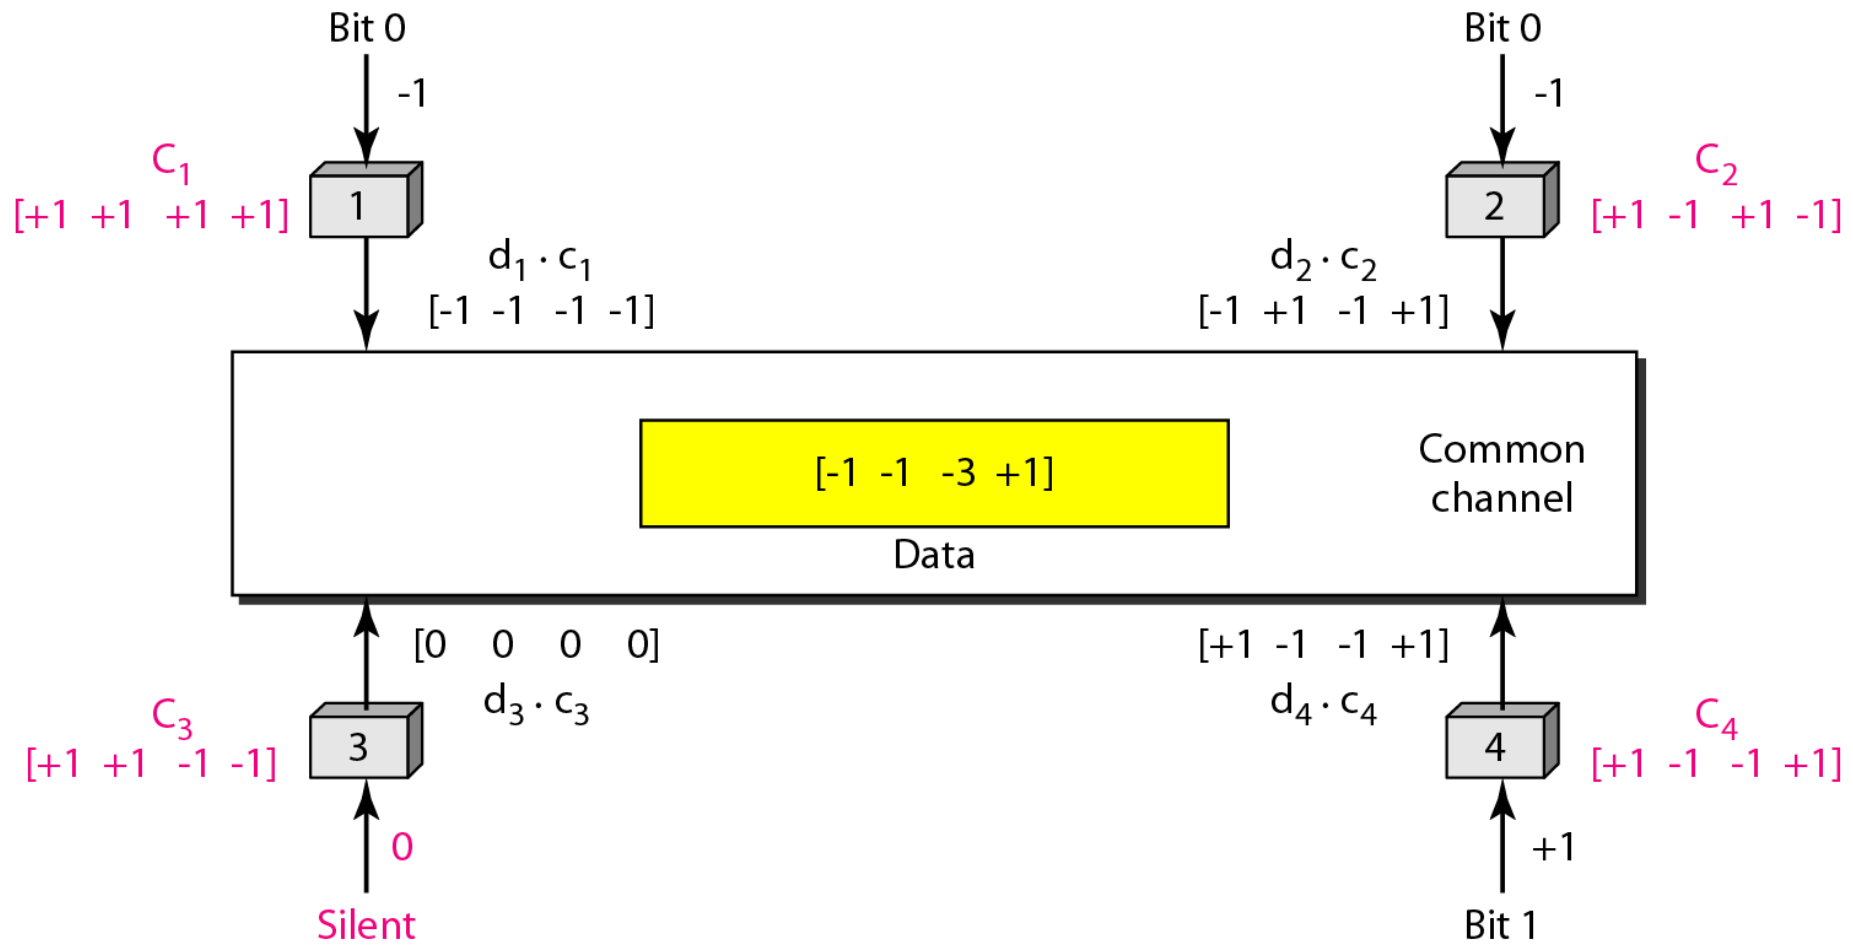


**Figure 12.27** *Digital signal created by four stations in CDMA*

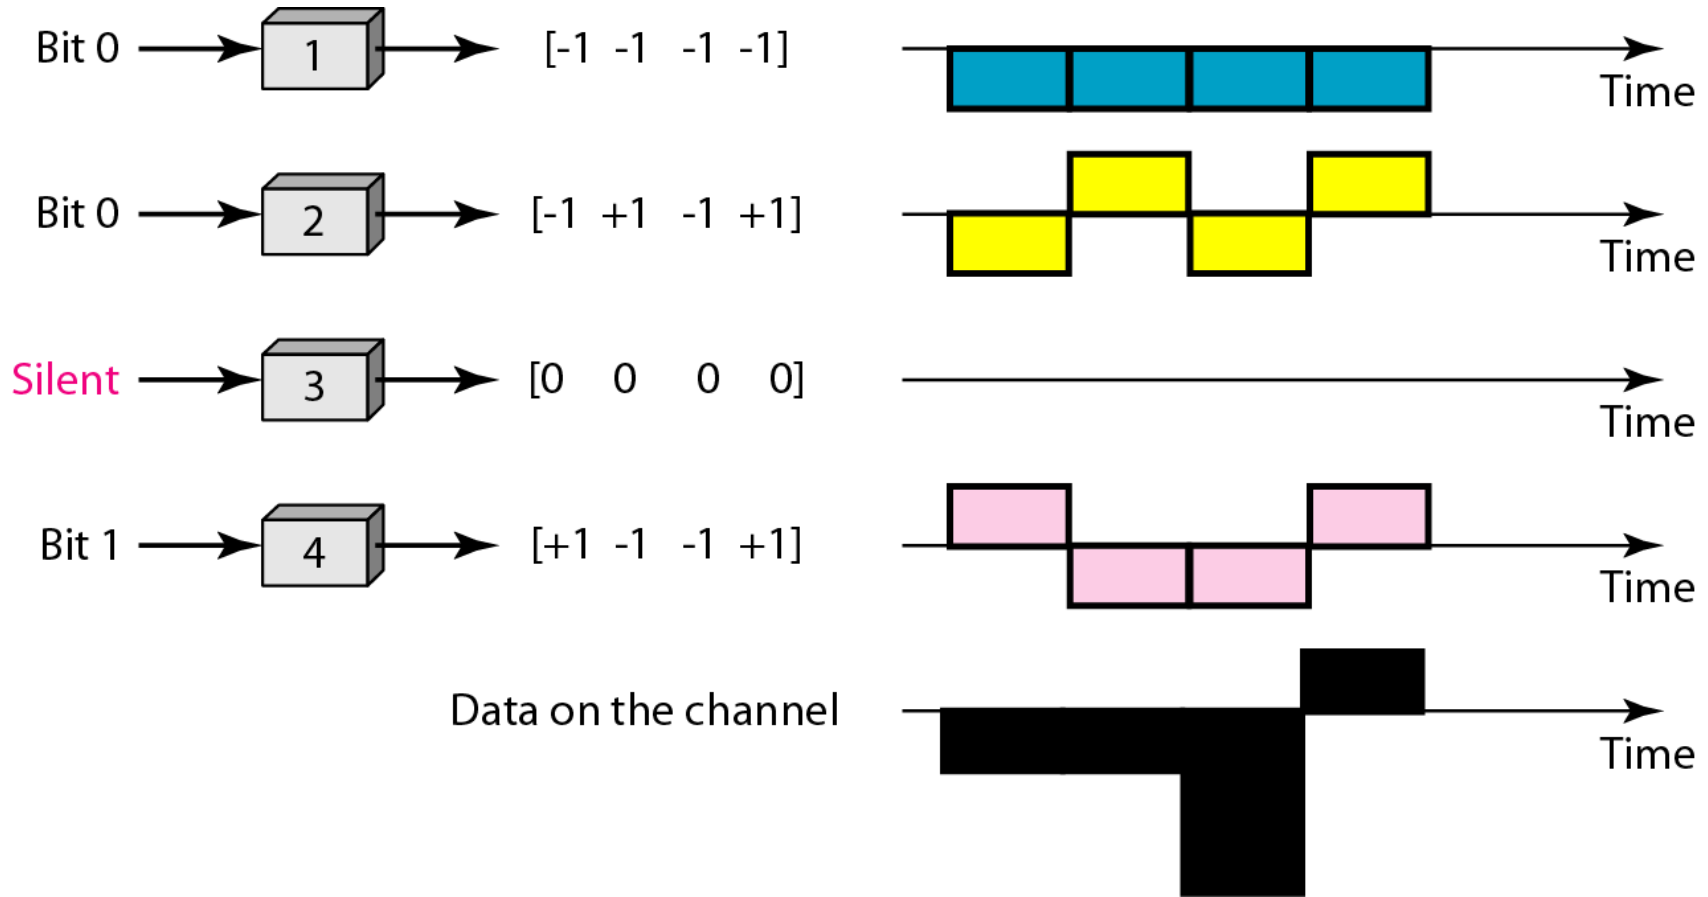



**Figure 12.28** *Decoding of the composite signal for one in CDMA*

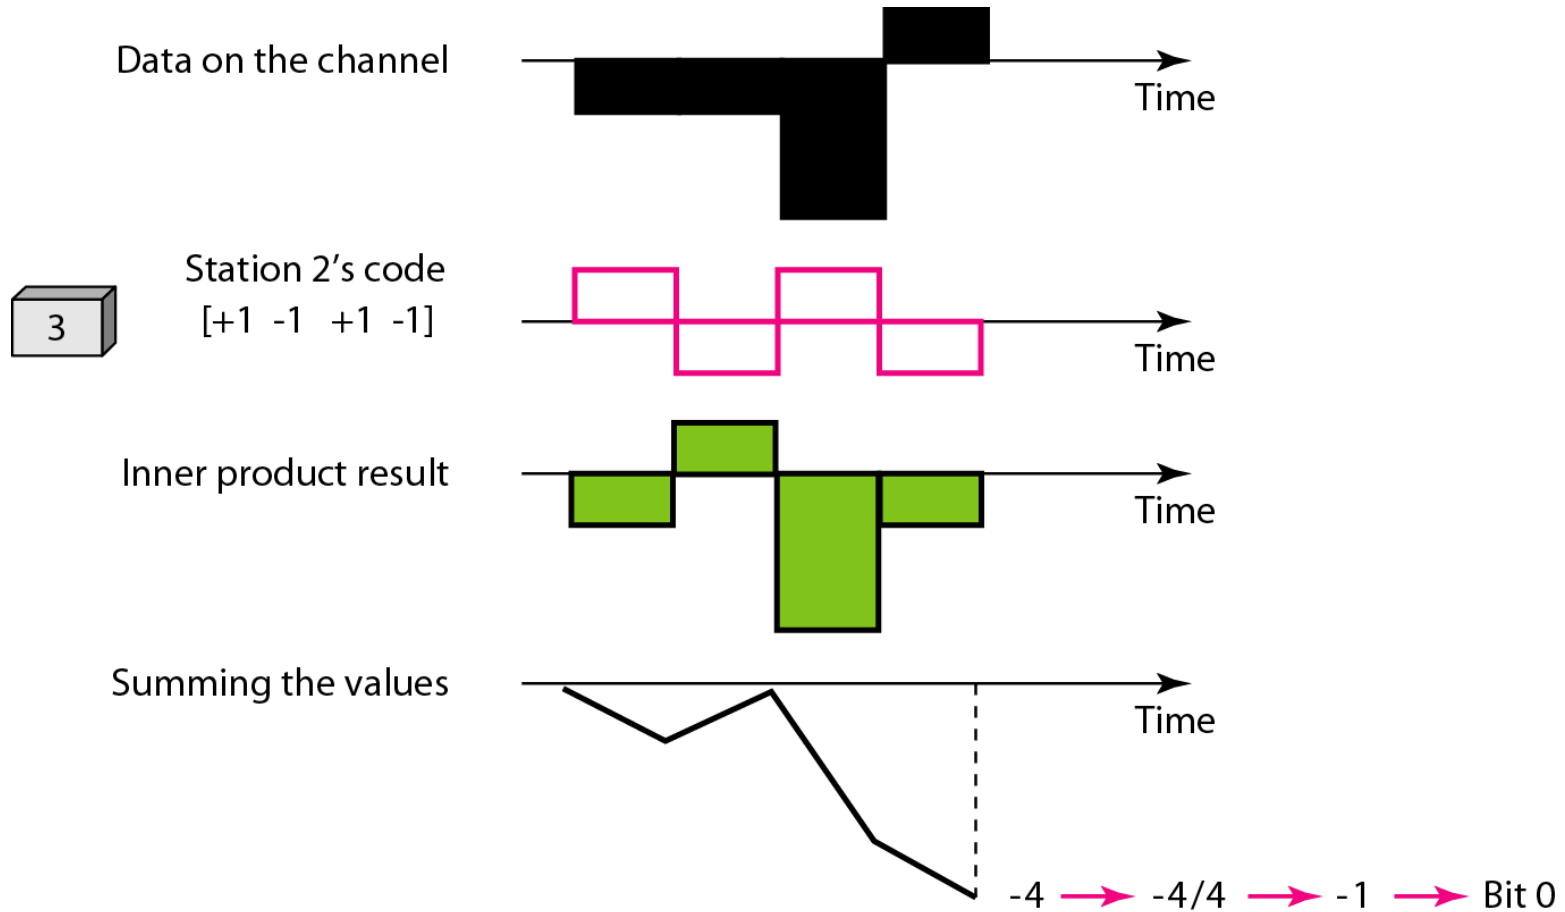

## Figure 12.29 *General rule and examples of creating Walsh tables*

$$W_1 = \begin{bmatrix} +1 \end{bmatrix} \qquad W_{2N} = \begin{bmatrix} W_N & W_N \\ W_N & \overline{W_N} \end{bmatrix}$$

a. Two basic rules

$$W_1 = \begin{bmatrix} +1 \end{bmatrix}$$
$$W_2 = \begin{bmatrix} +1 & +1 \\ +1 & -1 \end{bmatrix}$$
$$W_4 = \begin{bmatrix} +1 & +1 & +1 & +1 \\ +1 & -1 & +1 & -1 \\ +1 & +1 & -1 & -1 \\ +1 & -1 & -1 & +1 \end{bmatrix}$$

b. Generation of  $W_1$ ,  $W_2$ , and  $W_4$



*Note*

**The number of sequences in a Walsh table needs to be  $N = 2^m$ .**



## *Example 12.6*

*Find the chips for a network with*

*a. Two stations*

*b. Four stations*

### *Solution*

*We can use the rows of  $W_2$  and  $W_4$  in Figure 12.29:*

*a. For a two-station network, we have*

$$[+1 \ +1] \text{ and } [+1 \ -1].$$

*b. For a four-station network we have*

$$[+1 \ +1 \ +1 \ +1], [+1 \ -1 \ +1 \ -1], \\ [+1 \ +1 \ -1 \ -1], \text{ and } [+1 \ -1 \ -1 \ +1].$$



## *Example 12.7*

*What is the number of sequences if we have 90 stations in our network?*

### *Solution*

*The number of sequences needs to be  $2^m$ . We need to choose  $m = 7$  and  $N = 2^7$  or 128. We can then use 90 of the sequences as the chips.*

## Example 12.8

*Prove that a receiving station can get the data sent by a specific sender if it multiplies the entire data on the channel by the sender's chip code and then divides it by the number of stations.*

### *Solution*

*Let us prove this for the first station, using our previous four-station example. We can say that the data on the channel*

$$D = (d_1 \cdot c_1 + d_2 \cdot c_2 + d_3 \cdot c_3 + d_4 \cdot c_4).$$

*The receiver which wants to get the data sent by station 1 multiplies these data by  $c_1$ .*

## *Example 12.8 (continued)*

$$\begin{aligned} D \cdot c_1 &= (d_1 \cdot c_1 + d_2 \cdot c_2 + d_3 \cdot c_3 + d_4 \cdot c_4) \cdot c_1 \\ &= d_1 \cdot c_1 \cdot c_1 + d_2 \cdot c_2 \cdot c_1 + d_3 \cdot c_3 \cdot c_1 + d_4 \cdot c_4 \cdot c_1 \\ &= d_1 \times N + d_2 \times 0 + d_3 \times 0 + d_4 \times 0 \\ &= d_1 \times N \end{aligned}$$

*When we divide the result by  $N$ , we get  $d_1$ .*